



REQUIREMENTS FOR URBAN BUSES IN NEW ZEALAND

for consistent urban bus quality (2021)

31 MARCH 2021

Copyright information

This publication is copyright © Waka Kotahi NZ Transport Agency. Material in it may be reproduced for personal or in-house use without formal permission or charge, provided suitable acknowledgement is made to this publication and Waka Kotahi as the source. Requests and enquiries about the reproduction of material in this publication for any other purpose should be made to:

Manager, Information
Waka Kotahi NZ Transport Agency
Private Bag 6995
Wellington 6141

The permission to reproduce material in this publication does not extend to any material for which the copyright is identified as being held by a third party. Authorisation to reproduce material belonging to a third party must be obtained from the copyright holder(s) concerned.

Image copyright: Emma Hatton, Radio New Zealand.

Disclaimer

Waka Kotahi has endeavoured to ensure material in this document is technically accurate and reflects legal requirements. However, the document does not override governing legislation. Waka Kotahi does not accept liability for any consequences arising from the use of this document. If the user of this document is unsure whether the material is correct, they should refer directly to the relevant legislation and contact Waka Kotahi.

More information

Waka Kotahi NZ Transport Agency
Published March 2021

ISBN 978-0-478-41988-7 (online)

If you have further queries, call our contact centre on 0800 699 000 or write to us:

Waka Kotahi NZ Transport Agency
Private Bag 6995
Wellington 6141

This document is available on the Waka Kotahi website at <http://www.nzta.govt.nz>

Contents

| | |
|--|-----------|
| REQUIREMENTS FOR URBAN BUSES IN NEW ZEALAND | 1 |
| 1. INTRODUCTION | 8 |
| 1.1. Introduction | 8 |
| 1.2. Scope | 9 |
| 1.3. Bus sizes | 11 |
| 2. DESIGN AND PERFORMANCE | 12 |
| 2.1. Introduction | 12 |
| 2.2. Maximum vehicle age and fleet average age profile | 12 |
| 2.3. Performance | 12 |
| 2.4. Environmental | 13 |
| 3. VEHICLE ENTRANCE AND EXIT | 15 |
| 3.1. Ramp | 15 |
| 3.2. Ticketing/fare collection area | 15 |
| 3.3. Doors | 16 |
| 3.4. Step height/depths | 16 |
| 3.5. Step and plinth edges | 17 |
| 4. VEHICLE INTERIOR | 18 |
| 4.1. Driver compartment | 18 |
| 4.2. Driver operational communication | 18 |
| 4.3. Priority seating area | 19 |
| 4.4. Wheelchairs | 21 |
| 4.5. Floors | 22 |
| 4.6. Aisle width | 22 |
| 4.7. Seating design | 23 |
| 4.8. Stanchions/handrails | 24 |
| 4.9. Grab handles on seat backs | 27 |
| 4.10. Internal lighting | 28 |
| 4.11. Security and safety | 29 |
| 4.12. Heating, ventilation and air conditioning (HVAC) | 32 |
| 4.13. Demisting | 32 |
| 4.14. USB Power Ports | 32 |
| 5. COMMUNICATION | 33 |
| 5.1. Requirements | 33 |
| 5.2. “Bus stopping” electronic signs and buttons | 33 |
| 5.3. External destination display | 34 |
| 5.4. Exterior Promotional Area | 35 |
| 5.5. Internal information | 35 |
| 6. EXISTING BUSES | 37 |
| 6.1. Introduction | 37 |
| 6.2. Existing bus standards | 37 |

| | | |
|-----------|---|-----------|
| 6.3. | Midlife refurbishment requirements | 38 |
| 7. | APPENDIX: | 39 |
| 7.1. | Items not included | 39 |
| 7.2. | Visual Contrast | 39 |
| 7.3. | Bicycle racks | 40 |
| 7.4. | Noise Measurement | 41 |
| 7.5. | Process for seeking a variation to these requirements | 43 |
| 8. | FUTURE INTENTION: | 45 |
| 8.1. | Future technologies intended to be required (in no particular order): | 45 |
| 9. | APPENDIX 1: PROCUREMENT VARIATION | 46 |
| | APPLICATION TEMPLATE | 46 |

Record of amendments

| Amendment number | Description of change | Effective date | Updated by |
|------------------|--|-------------------------|---|
| 1 | Review of RUB first published in 2008 | Start of 2012-2015 NLTP | Chad Barker |
| 2 | Amendment to accommodate the introduction of double-decker buses | July 2013 | Chad Barker |
| 3 | Three-yearly review of the RUB | December 2014 | Chad Barker |
| 4 | Regular review of the RUB post PTOM contract implementation | March 2021 | Michelle McCormick/ Kirsten Boardman |

Abbreviations and definitions

| | |
|-------------|--|
| AB | Articulated bus |
| AS 3696.13 | Australian Standard AS.3696.13 Wheelchairs – determination of co-efficient of friction of test surfaces |
| BCA | Bus and Coach Association New Zealand |
| Contrast | Refers to the ability to distinguish between two colours, see Visual contrast (section 7.2) |
| DD | Double decker |
| ECE | Economic Commission for Europe |
| ESC/ESP | Electronic stability control or programme |
| EV | Electric vehicle |
| FMVSS | Federal Motor Vehicle Safety Standard |
| GPS | Government Policy Statement |
| Grab handle | Has the same meaning as 'handgrip' |
| GVM | Gross vehicle mass |
| HFC | Hydrogen Fuel Cell Bus – bus that uses a hydrogen fuel cell as its power source for electrically driven wheels |
| LB | Large bus |
| LBDD | Large bus double-decker |
| LEF | Low-entry floor – low entry from the front entrance to the rear exit, including priority seating area |
| LTMA | Land Transport Management Act 2003 |
| MB | Medium bus |
| NLTF | National Land Transport Fund |
| NLTP | National Land Transport Programme |
| P&I | The Waka Kotahi Planning and Investment group |

| | |
|------------------|---|
| PTOM | Public Transport Operating Model |
| RTS14 | Road and traffic standard series RTS14 Guidelines for facilities for blind and vision impaired pedestrians (revision 2, 2009) |
| RUB | Requirements for urban buses in New Zealand: New Zealand's common standard for urban bus quality |
| SB | Small bus |
| SLF | Super low floor – low floor throughout the passenger compartment |
| Seat | The assembly, or part of an assembly, intended to seat at least one person |
| Seating position | A seat or part of a seat that is of a suitable size and shape for one person |
| UN/ECE | United Nations Economic Commission for Europe |
| VSB | Very small bus |
| VLB | Very large bus – double decker buses or articulated buses |
| Waka Kotahi | Waka Kotahi NZ Transport Agency |

1. INTRODUCTION

1.1. Introduction

1.1.1. Purpose of the RUB

The purpose of the *Requirements for urban buses in New Zealand* (the 'RUB') is to standardise urban bus requirements across regional councils and Auckland Transport to create efficiencies and improve the usability and accessibility, as well as environmental quality, of buses for all customers. The RUB is intended to be the standard for national bus quality and efficiency and takes precedence over regional vehicle quality standards.

The adoption of a common standard approach like the RUB results in:

- net savings, due to reduced capital and operating costs of purchasing and operating urban buses
- reduced time in understanding and complying with multiple regional vehicle quality standards, and
- more efficient use of urban buses by public transport operators because buses can be used in more than one region without costly modifications.

The RUB has wider benefits at a national level, including:

- improving the perception held by existing and potential users that buses can be used for all urban travel, including commuter, shopping, education and recreational activities travel
- an increase in usage of public transport, including by an ageing population and people with physical, sensory and cognitive impairments
- reducing bus design and feature variations that result in higher unit costs for supply, and
- safety and environmental benefits.

Waka Kotahi agrees that the quality of buses is necessary for creating a valued customer experience. It is also an important way to attract more patronage from people who have a greater choice about whether they use public transport to get to where they want to go. The RUB is a common New Zealand-wide vehicle quality standard for use in urban bus contracts. Regional councils and Auckland Transport must use the RUB so that they can access Waka Kotahi investment for public transport services involving buses. Waka Kotahi requires this through its procurement rules.

The RUB was developed through a collaborative process with regional councils, Auckland Transport, Bus and Coach Association New Zealand (BCA), bus operators and suppliers to the industry. A considerable amount of work was undertaken with organisations representing people with impairments. As part of the development of the RUB it was agreed by the stakeholders that it should be reviewed every three years.

1.1.2. The evolution of the RUB

In 2007/08, regional councils requested advice from Waka Kotahi about the terms that should be in their new urban bus services contracts, so that those contracts provided for better access and usability of vehicles by customers.

The BCA also indicated its interest in obtaining more uniformity than currently existed in vehicle quality standards used by regional councils throughout New Zealand for operational reasons and potential cost savings.

Waka Kotahi agreed that it was beneficial to develop a set of vehicle requirements for urban buses to be applied nationally. A key issue was (and continues to be) how to provide for the mobility needs of people with physical, sensory and cognitive impairments. There was also a conscious effort from stakeholders involved in planning and investing in public transport to look for ways to improve the customer experience.

The first version of the RUB was published in December 2008 and came into effect on 1 January 2010, providing a transition period for regional councils and operators. The RUB was updated in September 2011 to clarify its purpose, update vehicle requirements, and make it a Waka Kotahi procurement rule to be able to access Waka Kotahi investment for public transport services involving buses. It was updated in July 2013 to include definitions of double-decker buses and again in December 2014 as part of the three-yearly review.

1.1.3. Strategic context

The Land Transport Management Act 2003 (LTMA) has a purpose of contributing to an effective, efficient and safe land transport system in the public interest. The LTMA provides the legal framework for managing and investing in land transport activities. The LTMA requires Waka Kotahi to invest its revenue in a manner that seeks to achieve value for money.

The Government Policy Statement (GPS) on land transport highlights the government's outcomes and priorities for the land transport sector and sets out an investment range for different activities over a 10-year period. The current GPS (2021) highlights four clear priorities: a safer transport network free of death and injury, accessible and affordable transport, reduced emissions, and value for money. Waka Kotahi applies the GPS to its investment decision-making through an Investment Assessment Framework. In this context, increasing the value for money from public transport investment, and making the most of urban network capacity is a priority.

Part 5 of the LTMA sets out the statutory provisions regulating and managing public transport in New Zealand. These provisions, which are based on government policy known as the Public Transport Operating Model (PTOM), form the high-level legal framework designed to improve procurement outcomes and service delivery of public transport. PTOM was a paradigm shift in the delivery of public transport services in New Zealand with the aim of providing a framework for building long-term, collaborative public transport partnerships between regional councils, Auckland Transport and bus operators. At a high level, the aim of PTOM was to grow patronage with less reliance on public subsidy.

1.1.4. Implementation

Waka Kotahi expects that all Regional Public Transport Plans prepared under the LTMA include a policy of using the RUB for vehicle quality standards, and all public transport contracts will incorporate the RUB requirements as they are rolled out.

1.1.5. Verification of RUB requirements

The requirements of the RUB are contractual in nature. Compliance with the RUB is not checked during inspection and certification for entry into service or afterwards at in-service periodic inspections and certifications (CoFs). This is because verifying buses' compliance to the RUB is outside the scope of Land Transport Rule: Vehicle Standards Compliance 2002.

All public transport contracts incorporating the RUB must incorporate an inspection regime to verify compliance. At a minimum, compliance with the RUB must be verified prior to entering urban service and continued compliance must be verified as required by the regional council.

Inspection organisations and vehicle inspectors appointed by Waka Kotahi to conduct inspections and certifications for entry into service or in-service periodic inspection and certification are well-positioned to be able to conduct RUB compliance checks. Additional tools may be required, such as lighting meters or noise meters. Regional councils can choose to verify compliance with the RUB themselves or can outsource the RUB compliance inspections to CoF-A (light vehicle) or CoF-B providers (heavy vehicles), or another capable organisation, via agreement.

1.2. Scope

1.2.1. Regional councils / Auckland Transport contracted urban bus services

The RUB applies to approved organisations contracted to deliver public transport bus services in urban centres. The specifications contained in this document apply to buses entering the urban fleet for the first time, however, there are some minimum specifications that will apply to existing buses (see section 6).

This document is also not generally applicable to other forms of bus and coach operations, eg approved organisation's contracted school and rural services, tourist, charters, intercity services or school services funded by the Ministry of Education, and either contracted through its agents or directly by schools themselves. Again, however, there are some minimum specifications that can be applied, at an approved organisation's discretion, to buses providing school and rural services (see section 6, including options for maximum age).

1.2.2. What does 'new to urban service' mean?

'New to urban service' means any new or used bus entering urban service in New Zealand for the first time. Technically, there are two definitions of a 'new' bus – the date of manufacture and the date of first registration in New Zealand.

This distinction is important to note because a bus will have a date of manufacture, then after it comes into New Zealand and is entry certified here, the bus is only subject to land transport rules when it is registered to go on the road. However, the relevant date here is the date of registration in New Zealand.

In the case of any existing urban service bus being accepted into a new urban service contract, the bus in question must:

- comply with the version of the RUB applicable to the age of the bus, or
- if pre-RUB, at a minimum meet the requirements listed in section 6, and
- be acceptable to the receiving regional council.

In the case of any bus entering into an urban service contract for the first time, the bus in question must:

- comply with the latest version of RUB, and
- the vehicle age will be deemed to be from the date of first registration anywhere.

1.2.3. Does the RUB apply to new, used and existing vehicles in the fleet?

- This document is intended for use by approved organisations in their procurement of urban bus services. It specifies: requirements that apply to all buses entering urban service as PTOM contracts are rolled out (sections 2 to 5).
- Requirements for existing urban service buses accepted into a new urban contract (section 6).
- Requirements for the midlife refurbishment of existing fleet (section 6.3).

1.2.4. Special exemption for some bus orders

Any buses that have been ordered prior to publication of this version of the RUB will be exempt, provided that the last delivery date for any such bus under the contract with the supplier is no later than one year after the commencement of the RUB in force at this time. This includes orders for newly constructed buses, as well as new or used imports.

Operators will need to provide written evidence to the relevant regional council to confirm contracts and delivery schedules to qualify for this exemption. Any bus qualifying for this exemption must still comply in all respects with the previous version of the RUB published in 2014 and/or vehicle quality standards in place at the time.

1.2.5. RUB compliance and variation for rural services, inter-city commuter, and airport services

All buses contracted to approved organisations must be RUB compliant. Buses providing urban school trips which are part of PTOM unit contracts must also comply with the RUB. Variations could be considered for buses providing a unique commuter service (eg extra luggage space for an airport service) but must maintain wheelchair accessibility and priority seating. It is important for bus providers to engage with the disability community when considering these unique solutions. These alternative solutions may have unique ticketing solutions.

- A very small bus (VSB) has 13 to 25 passengers (excluding the driver), includes a minimum of 13 seating positions.
- 'Inter-city commuter service' refers to any service that is a longer distance service that travels on open roads.
- 'Rural service' means any service that begins or ends in a rural area.
- 'Rural area' means any area judged to be rural in character, based on a reasonable assessment of its geographic features, resident population, dominant forms of employment and other relevant features¹.

¹ In the event of dispute, this is to be determined by Waka Kotahi at its sole discretion. Population and other statistical data (where used) to be sourced from the most recent national census data compiled by Statistics New Zealand.

This RUB is focused on the quality and usability aspects required to meet the needs of public transport bus customers. It is a quality standard delivered through a supplier service contract relationship and is subsidiary to the land transport rules. These rules are legislative requirements focussing on, among other things, commercial vehicle safety, dimensions, mass and emissions.

This document is subsidiary to the legislative requirements for vehicles in New Zealand. All requirements of the RUB are in addition to, and do not replace land transport rules.

See land transport rules on the Waka Kotahi website here: <https://www.nzta.govt.nz/resources/rules>

1.2.6. Regular reviews of the RUB

The practical implementation of these requirements may highlight new ways of dealing with particular issues that may arise and the intent is that we should make improvements if need be. It is, therefore, proposed that this document be formally reviewed every three to five years or the recommendation of the review panel.

1.3. Bus sizes

For the purpose of this document, a bus is a heavy vehicle that provides a service with more than 12 seating positions.

| | |
|-----------------------------|---|
| Very small bus (VSB) | 13 to 25 passengers (excluding the driver), includes a minimum of 13 seating positions |
| Small bus (SB) | 30 or more passengers (excluding the driver), includes maximum of 23 seating positions |
| Medium bus (MB) | 54 or more passengers (excluding the driver), includes minimum of 24 seating positions. If double decker, MBDD |
| Large bus (LB) | 75 or more passengers (excluding the driver) includes minimum of 36 seating positions. If double decker, LBDD; if articulated, LBAB |
| Very large bus (VLB) | 95 or more passengers (excluding driver) includes minimum of 80 seating positions. If double decker, VLBDD; if articulated, VLBAB |

References are to all bus sizes unless specifically noted as to the size category in the relevant sections that follow.

2. DESIGN AND PERFORMANCE

2.1. Introduction

The chassis must be fit for purpose as required by the heavy vehicles rules, eg Land Transport Rule: Vehicle Dimensions and Mass 2002 and Land Transport Rule: Passenger Service Vehicles 1999. The chassis shall be of an appropriate design and use protective material, or techniques such that a bus can be expected to give 20 years reliable life under normal high-intensity urban operational conditions of service, without incurring major structural failures or the need for major overhaul requirements due to operating, roading, and environmental conditions, excluding those that are attributable to vehicle crashes.

2.2. Maximum vehicle age and fleet average age profile

The maximum permitted vehicle age is 20 years from the date of first registration anywhere in the world – this also applies to EV buses. At the ‘midlife’ of a bus (around 10 years from first entry into urban service in New Zealand) a bus must be refurbished (refer to section 6.3). Consideration needs to be given to the whole-of-life of an EV and for the recycling of the vehicle’s components.

Note: This applies to all vehicles, irrespective of whether they are new to urban service or existing buses.

2.3. Performance

All sizes – includes all modes of propulsion, ie liquid fuel, electricity, gas, hydrogen, or hybrid. By 2025, the government will only allow zero-emission public transport buses to be purchased. This commitment targets complete decarbonisation of the public transport bus fleet by 2035.

| | |
|--|--|
| Acceleration (all buses) | Minimum: 0-50km/h ≤ 18 seconds. Note: Acceleration is measured in an unladen bus on a level road. The average of two tests, one in each direction within a period of 30 minutes. (Harsh acceleration is covered in section 4.11). |
| E-bus range without refuelling | Minimum of 350km throughout the service life of the bus. |
| Transmission | Fully automatic or electronic shift, plus retarder (does not apply to EV buses). |
| Suspension (all buses except VSB) | Air suspension. Kneeling capability at front door with a kneel and rise time of <8 seconds each. Electronically controlled air suspension, including self-levelling. |
| Stability and steering | ESC/ESP is required for DD buses. |
| Vehicle braking | Anti-lock braking system and electronic braking system is required. |
| Hold brake/ interlock | Vehicles must be capable of being held by the hold brake (the automatic activation of the service brakes upon the opening of the doors), restarting without rolling back on sealed grades. Additional option – engage the hand brake system before doors can be opened. |

| | |
|--|--|
| | <p>If the passenger door is opened and the vehicle is stationary, the brakes must be activated, the engine throttle returned to idle, and the vehicle incapable of moving.</p> <p>It must not be possible for the brakes to be released unless done so by the driver, in the driver's seat.</p> |
| General safety, fire resistance and suppression | <p>Non-flammable material – comply with ECE 118.02.</p> <p>Engine compartment for diesel: fire retardancy ISO 3795 (1998) or FMVSS 302 or UN/ECE reg. 118 (or technical equivalent).</p> <p>Fire suppression for engine and high-voltage battery compartment is mandatory: must be compliant with Australian Standard 5062-2006 (Fire protection for mobile and transportable equipment) or an equivalent internationally recognised standard.</p> <p>Battery packs & EV systems: must comply with UN/ECE reg. 100 (or technical equivalent) for EVs.</p> <p>Hydrogen fuel cell vehicles: ECE no.79/2009 (or technical equivalent).</p> <ul style="list-style-type: none"> – Indication on the bus is needed to identify propulsion type and a standard location of a kill switch. Note: it is critical that the kill switch is not used to turn off the bus unless in an emergency, especially on a hydrogen bus, consider this being in a break-glass housing. <p>An external common label/sticker with E or H, similar to LPG and CNG, is required to be placed near the number plate, as per LPG/CNG requirements, to identify electric or hydrogen buses to emergency services. This label/sticker is not required for diesel or petrol buses. Additional signs to be placed on external panels identifying where battery packs are located.</p> |

2.4. Environmental

| | | |
|--------------------------|--|--|
| Exhaust emissions | <p>Current vehicle exhaust emissions rule with the exception that EURO VI-C stage (as defined in table 1 of appendix 9 of Commission Regulation (EU) No 582/2011) or better is required for a new bus.</p> <p>Any emissions-defeating or tampering (eg cheating devices, ecu-remapping). That disables AdBlue or other systems is strictly prohibited.</p> <p>All emissions control equipment must remain functional and within safe tolerance of its state when manufactured.</p> | |
| External noise | These situations reflect urban on-road performance. | |
| | On-road noise | <p>Maximum peak 77 dB(a), measured while driving by at 50km/h, fully laden, measured at a distance of 7.5 metres from the centreline.</p> <p>For microphone setup, refer to figure 1 of annex 3 of UN/ECE reg. No. 51, also referenced in 7.4.1.1.</p> |

| | | |
|-----------------------|-----------------------|---|
| | Air brake noise | Maximum 72 dB(a), measured at a distance of 7 metres while the vehicle is stationary. Refer to figure 1 of annex 5 of UN/ECE reg. No. 51 for positioning of sound meter for testing and 7.4.1.2. |
| Internal noise | | Attention must be taken to minimise noise, vibration and harshness transmitted to passengers. Factors such as noise, mechanical noise and air conditioning noise must be minimised. |

3. VEHICLE ENTRANCE AND EXIT

3.1. Ramp

| | |
|------------------------|---|
| Measurements | <p>An electric sliding or manually operated flip-over style $\geq 800\text{mm}$ width ramp must be provided at the front door that can be deployed and recovered by the driver on request, where the kneeling facility proves to be insufficient.</p> <p>The maximum ramp gradient must be 1:8 / 12.5%, from an infrastructure design standard kerb.</p> |
| Design features | <p>Ramp hinges and lifting handles (65mm minimum) must be countersunk/flush with the floor to reduce the interference to passengers on foot or in wheelchairs.</p> <p>If the ramp is not electrically operated, the driver's lifting handle must be full hand-width style, rather than a single digit ring-style pull up.</p> <p>The ramp surface (when deployed) must be covered in a slip resistant material (refer to Floors).</p> <p>The 3 edges of the ramp surface (when deployed) must be highlighted with a 50mm-wide yellow edge as detailed in section 3.5.</p> |
| Signage | <p>A wall mounted sign adjacent to the front door (preferably pictorial) shall indicate the permitted maximum weight of the ramp eg, 300kgs and maximum width of any wheelchair or pram that can be carried by the bus ie 700mm (excluding the user).</p> |

3.2. Ticketing/fare collection area

Any tag-on/tag-off equipment must be readily accessible and be easy to use by adults and children, irrespective of whether they have a disability or not. The positioning of the tag-on/tag-off equipment must be such that it does not reduce any of the clearances specified for accessibility.

| | |
|-------------------|--|
| Front door | <p>All ticketing/revenue collection that requires interaction with the driver (card or cash) for all passengers of any capability, including those using wheelchairs, is to be through the front door.</p> <p>Boarding using an electronic revenue system with a tag-on requirement must be through the front door only. Alighting using a tag-off electronic requirement may be through either the front or rear doors.</p> <p>Ticketing equipment and till stand should be ergonomically located for driver ease of use. Ticketing equipment and till stand must not impede the driver's vision or access by wheelchairs.</p> <p>The height of the electronic tag-on/tag-off machine sensor must be between 900-1000mm. The machine must be located on the modesty panel stanchion, immediately to the right-hand side of the front door entrance and must not impede wheelchair access.</p> |
|-------------------|--|

| | |
|------------------|---|
| Rear door | Alighting using a tag-off electronic requirement may be through either the front or rear doors. Must have the ability to tag on and off at the rear door. |
|------------------|---|

3.3. Doors

| | | |
|---|------------|---|
| Number | VSB/SB | One front door. |
| | MB/LB/VLB | One front and one rear. Larger vehicles that will be used solely on longer-distance urban express/limited stop style, or school bus services, may use only one door. Regional council prior approval for this configuration is required. |
| Location | All buses | Front door will be as close to the front of the bus as possible, and immediately opposite and in full view of the driver. |
| Design – door entrapment prevention | | A system must be fitted to the front and rear doors to prevent passengers (or personal items eg backpack) being trapped and the person dragged along the road (eg sensitive edge to a minimum height of 1500mm). |
| Widths (clear space excluding any handrails on the door) | Front door | ≥1000mm double leaf. |
| | Rear door | SB/SB/MB ≥700mm single or double leaf for the rear door, if fitted. LB/VLB ≥1000mm double leaf. |
| Rear doors | | A door system is required that cannot trap or crush people inside the bus (eg outward opening (plug) type doors). |
| Hold brake | | The activation of either door open control must activate the service brakes (braking system) (See 2.3 Performance) |
| Weather screen | | Provision for a weather screen shall be provided both sides of the rear door and at the rear side of the front door to provide passengers shielding from the weather when doors are open. Fitment is optional by approved organisation. |

3.4. Step height/depths

| | |
|--------------------------------------|--|
| Door step height measurements | <p>Measurement to be taken at the midpoint of the open-door aperture with the bus on level ground (not on a cambered surface) and includes the step edge nosing.</p> <p>Kneeling is a requirement for all buses, except VSBs.</p> <p>Automatic kneeling capability is not required, rather this should be manually controlled by the driver. If the capability is used every time the bus stops it will use unnecessary air and, therefore, increase fuel costs, as well as slow down overall journey times. A sign/sticker stating 'This bus kneels on request' must be provided on the exterior of the bus adjacent to the front door.</p> |
| Front and rear doors | <p>≤370mm at normal ride height.</p> <p>Kneel height at the front door to be between 245–280mm.</p> |

| | |
|--|---|
| Ground clearance | Vehicles must have sufficient ground clearance to permit the body (including skid plates) of the vehicle to pass over a Kassel kerb without making contact with the kerb. These kerbs are 180mm high above the road surface, immediately adjacent to the Kassel kerb. |
| Any additional steps, including aisle or seat plinths | <p>For passenger confidence, step heights should preferably all be of equal height. A maximum of two different heights is permitted.</p> <p>Minimum step depth (ie the horizontal measurement from the front edge to face of the next riser), except for any steps to access forward facing seats on the front of the wheel arches minimum step depth, is >220mm. To be clear, this applies to any steps into the rear saloon area by the rear door/axle location.</p> <p>The steps to the rear saloon must be built into the rear saloon floor. There must be no steps in the rear doorway.</p> |

3.5. Step and plinth edges

| | |
|---------------|---|
| Design | <p>All steps at door entry and exits or within the vehicle shall have full width step edges (nosing) fitted with a distinctive high-visibility yellow colour, slip resistant/non-trip style nosing in a solid band, contrasting with the immediately adjacent flooring material.</p> <p>The steps' high-contrast nosing in the horizontal planes is to be within the range of 50mm – 65mm wide and 30mm – 55mm on the vertical planes.</p> <p>Floors (section 4.5) for the slip resistant performance requirements. Refer to Visual contrast (section 7.2) Visual contrast for the contrasting colour performance requirements.</p> |
|---------------|---|

4. VEHICLE INTERIOR

4.1. Driver compartment

The role and responsibility of the urban bus driver in coping with the levels of urban traffic and congestion, the various requirements of passenger loading, revenue collection, unloading and dealing with the range of passenger requests for assistance and information is a demanding one. Any features that make the task easier and safer to carry out will be to the overall benefit of the public bus transport industry. The bus driver's compartment is part of his/her workplace and they can spend most of their working day in that compartment.

| | |
|--------------------------|---|
| Comfort | <p>Provision of:</p> <ul style="list-style-type: none"> • A fully sprung driver's seat with adjustment for all three planes of driving position. The driver's seat suspension should be capable of being adjusted to cater for varying driver weight. • A readily adjustable (tilt and height) steering wheel column and soft style easily cleaned, and dried, steering wheel. • A footrest for the left foot. • Coat/jacket storage, eg hook. • An area out of sight for the storage of personal belongings such as bag/lunchbox. • A seatbelt is required. • Personal driver-controlled form of heating and cooling, including to the foot area. Can be part of the bus climate control system, but the driver must be able to control the flow and direction. |
| On-board security | <p>Barrier protection panel immediately behind the driver to prevent any form of assault from behind, either directly by a passenger or by a thrown object.</p> <p>A revenue collection and holding system so that the driver's cash can be readily and securely locked into a cash box that can be secured to the bus, eg to the ticket issuing equipment stand.</p> |

4.2. Driver operational communication

For an urban fleet service requiring more than five buses in service at any one time, a two-way radio shall be provided to provide communication between buses of the same operator, back to base depot and to any central information or control centre.


4.3. Priority seating area

The priority area is a key concept in achieving accessibility. The picture below shows the general location of the priority area – it is not intended to show all the features and dimensions of the priority area.


Priority seating for those with physical, sensory and cognitive impairments (including when accompanied by a guide dog) and parents/caregivers with children, irrespective of whether a pram or stroller is being used, must be located as far forward as possible to minimise the distance to the front door.

Diagrams below showing an example of (a) medium-sized and (b) large-sized bus priority seating area layout:

(a)

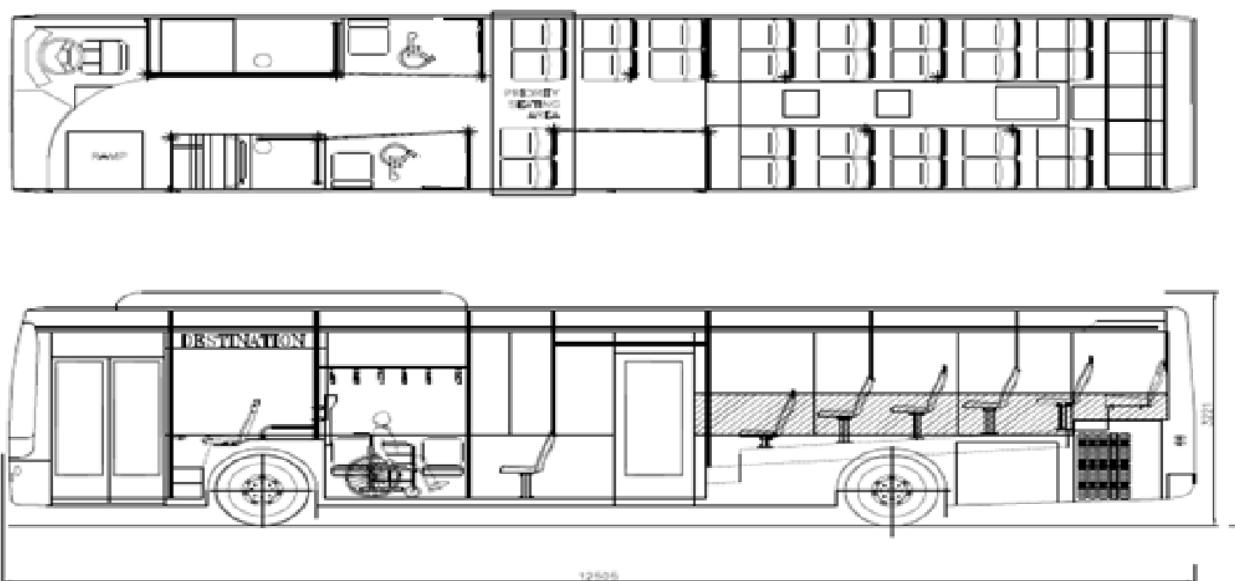

(b)

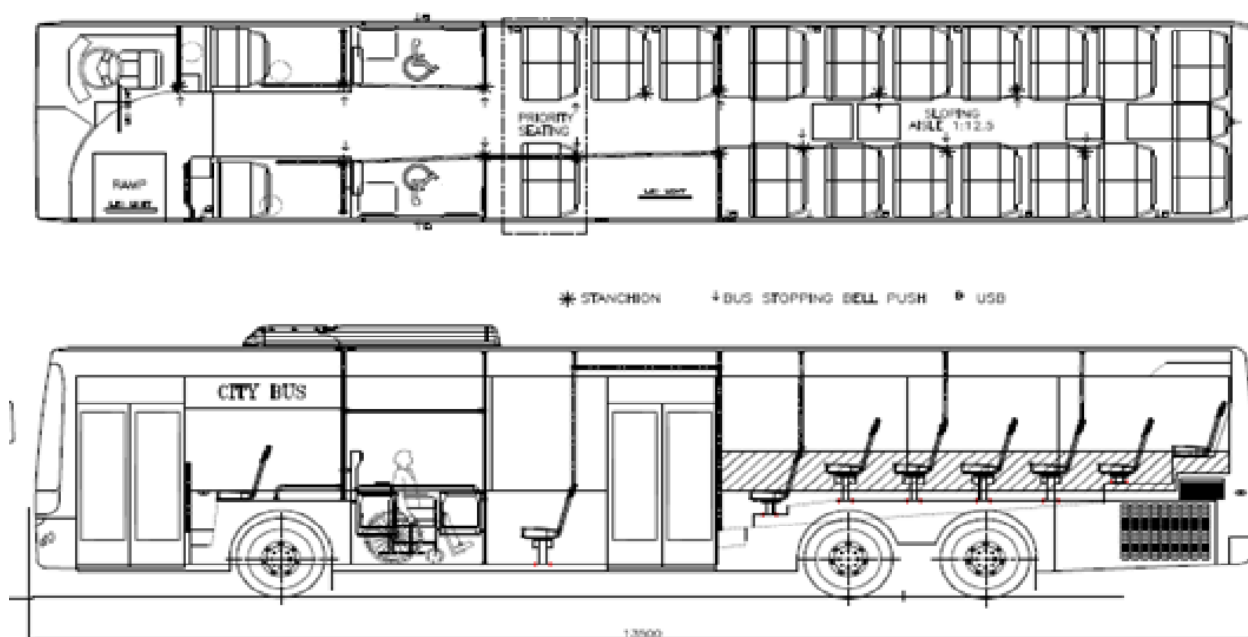


Provision shall be made as follows for passengers with physical, sensory or cognitive impairments, including those that may be accompanied by a guide dog:

| | |
|---------------------|--|
| Location | <p>The priority area is located well to the forward end of the saloon (in the case of an DD, the lower saloon), preferably immediately to the rear of the front wheel arches, or for DD immediately to the rear of the front wheel arches and stairwell, and encompasses a minimum of:</p> <ul style="list-style-type: none"> • for all buses there must be one multi-use/wheelchair space that will accommodate one wheelchair and user, or pram user, on the nearside of the vehicle, and • for single deck buses an additional multi-use/wheelchair space that will accommodate one wheelchair and user, or pram user, on the far side of the vehicle • one sideways facing, folding seat will be located immediately behind each wheel arch – to facilitate wheelchair access and stowage. Any fold-up seat must be capable of being held in the stowed position. <p>There must be a horizontal handhold for occupants of sideways facing seats.</p> |
| Measurements | <ul style="list-style-type: none"> • Multi-use/wheelchair spaces must have dimensions of not less than 800mm by 1300mm to cater for a wheelchair or other mobility device with a footprint of ≤700mm width x ≤1200mm length x 1100mm high and its user. The mobility device must be stable, ie must not fall over if not supported. |
| Signage | <ul style="list-style-type: none"> • Contrasting easily seen signage to indicate the area and request to vacate seats for use by passengers with disability/mobility needs along the following lines: ‘Priority seating area - please vacate these seats for elderly or disabled passengers or parents/caregivers with children.’ |

4.4. Wheelchairs

Wheelchairs are described as both manual self/caregiver-propelled or powered versions of required characteristics as follows:

| | |
|---------------------------|---|
| <p>Measurements</p> | <ul style="list-style-type: none"> The spaces provided for a wheelchair with a maximum dimension of ≤700mm width and ≤1200mm length. Double-barrelled hand holds to the rear of both wheelchair spaces must be 300mm clear of the floor with the vertical support to the floor no more than 500mm out from the wall. This provides additional foot space for a passenger in a wheelchair to manoeuvre into and out of the wheelchair space, as well as space providing sufficient space for a service dog.  |
| <p>Weight restriction</p> | <ul style="list-style-type: none"> Weight restriction of 300kg, including wheelchair and passenger. |
| <p>VSB/SB/DD</p> | <ul style="list-style-type: none"> To carry one wheelchair. |
| <p>MB/LB/VLB</p> | <ul style="list-style-type: none"> To carry two wheelchairs. |
| <p>Restrictions</p> | <ul style="list-style-type: none"> Powered mobility scooters and segways are not classed as a wheelchair and are not able to be carried due to their dimensions and restricted manoeuvrability. This restriction may be revisited at the next three-yearly RUB review, if evidence that more suitable (weight and dimensions) mobility scooters have become more widely available. |

4.5. Floors

| | |
|----------------------------|--|
| Slip resistance | <p>All floor surfaces must use a slip resistant material with, particular attention paid to its effectiveness in the entry and exit door areas, including the wheelchair ramp, and areas designated and signed for wheelchair users, priority seating and floor-positioned luggage areas.</p> <p>A slip resistant material means it meets one of the following criteria:</p> <ul style="list-style-type: none"> • ISO 7176-13 / AS 3696.13 coefficient of friction between 0.75 and 1 • ASTM D2047 ≥ 0.6 • Wet pendulum (TRRL, British Pendulum, PTV) ≥ 35 • AS 4586 $\geq P4$ • DIN 51130 $\geq R10$ • Surface microroughness $\geq 20 \mu\text{m}$ <p>Ramps, when deployed, must have greater slip resistance than flat areas (refer to Ramps).</p> |
| Contrasting colours | <p>Floor surfaces in the priority area must use easily seen contrasting colour flooring material, which contrasts to the flooring of the rest of the main saloon, including under the other passenger seats and any luggage areas. See also Visual contrast (section 7.2) Visual contrast.</p> |
| Signage | <ul style="list-style-type: none"> • “Please stand behind this line” floor insert or sticker to be positioned on the floor in the central aisle immediately behind driver’s seat. • Wheelchair signage as a flooring insert is required in addition to a sidewall-mounted wheelchair sign, which must clearly state that the wheelchair user must apply the wheelchair’s brakes and use the wheelchair restraint (if fitted), at all times when the bus is moving. Refer to section above. |
| VSB/SB | <ul style="list-style-type: none"> • Flat, or nearly flat, floor from front entry to immediately forward of rear axle is required for SB, and as close as practical for a VSB. |
| MB/LB/VLB | <ul style="list-style-type: none"> • Flat, or nearly flat, floor from front entry to rear edge of the rear door or immediately to the front of the rear axle if only one door (ie no steps). • Behind the rear door or rear axle stepped access (preferably a maximum of two, excluding any step access to the rear seat) in conjunction with sloping floors are acceptable. |

4.6. Aisle width

The manoeuvring width inside the front door entrance, fare paying and turning area must be at least the same as the aisle width between the wheel arches and up to the rear of the multi-use wheelchair space. There must be unimpeded access for a wheelchair and pram through the front wheel arches to at least the front edge of the rearmost set of priority seating or the rear of the wheelchair space.

| | |
|---|--|
| Swept path through entrance to rear of wheelchair /mobility device/pram area | VSB/SB: ≥780mm and such that a representative 700mm wide x 1200mm long x 900mm high box can pass through). |
| | MB/LB/VLB: ≥800mm and such that a representative 700mm wide x 1200mm long x 900mm high box can pass through). |
| Aisle width from front edge of rearmost set of priority seats | ≥450mm* for all buses *can be reduced to ≥440mm in upper deck of DD. |
| Shoulder room in aisles (above the seat back) | ≥550mm* * flexible grab handles can encroach on this requirement. |


4.7. Seating design


Seating must consist of a fabricated frame or moulded shell which must contain a flat bench style or minimally contoured squab, or padded insert style seat. A single layer unpadded fabric or synthetic material liner is not acceptable.


All materials must be vandal, fire, stain and odour resistant. They must also be hard-wearing and easy to clean.

| | |
|--|--|
| Seat width | Single seat: ≥425mm. |
| | Double bench or paired: ≥875mm. |
| | Parent/caregiver and child, on front wheel arch: ≥760mm. |
| Spacing | Forward facing: ≥690mm. |
| | Facing: ≥1300mm. Note: the forward-facing seat in the set must have a stanchion on the aisle side and a horizontal handrail on the wall. This may compromise the aisle width in this location, however as it is a safety feature it will take precedence over aisle width requirements. |
| Seat cushion depth | ≥350mm. |
| Seat cushion height from floor (may be reduced at wheel arches) | Between 450mm and 500mm for priority seating section or 400mm to 500mm everywhere else. (Can be reduced to 350mm at wheel arch and engine compartment.) |
| Seat back height from floor (excluding grab handle) | Between 850mm and 950mm. |
| Rear seats | The rear row of seats must be constructed so that there are no gaps between the seats and the rear wall, and around the sides or between separate seat sections. |

4.8. Stanchions/handrails

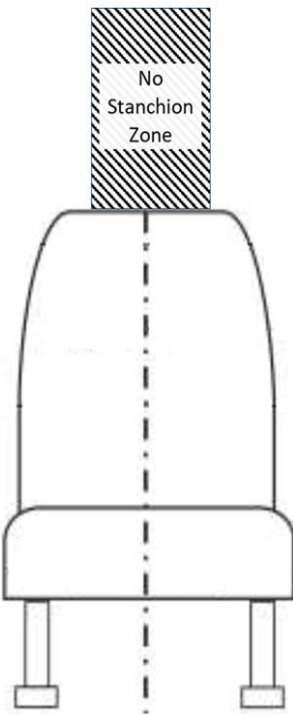
| | |
|-------------------------|--|
| Location | <p>Vertical high-visibility contrasting yellow colour (see Visual contrast (section 7.2) Visual contrast) stanchions from either floor to ceiling or seatback to ceiling, as location dictates, shall be fitted throughout the length of the bus and close to the aisle, but not impede movement along the aisle or within the wheelchair/multi-use space (eg floor-mounted stanchions can hinder wheelchair users' manoeuvrability).</p> <p>There must be no finger trap points in any locations where a passenger may use a stanchion, handrail or modesty panel to hold onto. A minimum finger space range of 35-45mm must be provided in these situations.</p> <p>Seat back stanchions must not be placed within 150mm of the centre line of the seating position to avoid possible head strike (see diagram below).</p>  <p>The diagram illustrates a top-down view of a bus seat. A vertical dashed line runs through the center of the seat backrest. Above the seat backrest, a rectangular area is shaded with diagonal lines and labeled 'No Stanchion Zone'. This indicates that stanchions should not be placed within this zone to avoid head strikes.</p> |
| Spacing on seats | <p>Except in the multi-use/wheelchair space and priority seating area, the stanchions must be spaced at alternate seats left and right of the aisle, and so that a passenger can stand safely or walk/move through the remainder of the bus while able to hold a stanchion with one hand at all times. This includes in the rear saloon, and upper saloon area for a DD. Additional overhead horizontal handrails are allowed (see paragraph below).</p> |
| Measurements | <p>Overhead contrasting colour handrails must be at a minimum of 1900mm from floor level; if higher, they must be fitted with fixed strap hangers spaced at approximately 380mm apart.</p> <p>Stanchion/handrail maximum cross-section dimension must be in the range of 30–35mm and must be of a circular or elliptical cross section.</p> <p>For stanchions and handrails, eg on the doors, in the fare paying area or on the top face of the front wheel arches, or within the multi-use/wheelchair space, they must have a finger/hand clearance space of between 35 and 45mm between any part of the vehicle, and all parts of a handrail other than its mountings.</p> |


| | |
|----------------------|--|
| Handrails | <p>In entry and exit areas, and the fare paying area, or areas where vertical stanchions are impractical, contrasting colour handrails must be provided in the following locations:</p> <ul style="list-style-type: none"> • Front dashboard. • Sidewall between facing seats and wheelchair areas. • Modesty panels. • Front doors. • Horizontal handrail in exit and wheelchair area. • Wheel arch/luggage area. |
| Double decker | <p>For DD – A modified stairwell handrail or alternative solution to reduce the risk of passenger falls. This must include:</p> <ul style="list-style-type: none"> • Vertical stanchions fitted in the stairwell and immediately next to it on top and bottom decks (pics 1, 2 and 3 below). • Fitment of additional vertical handrail on sides of the stairwell. • All other handrails in the staircase to be continuous to stop passengers having to let go of the supporting handrail while walking up and down the stairs. <p>Note: Handrails as per sample pictures from Auckland and Hong Kong buses below would be acceptable. Vertical stanchions on both sides of the stairwell are required.</p>  <p>Handrails and their ideal positions</p> |

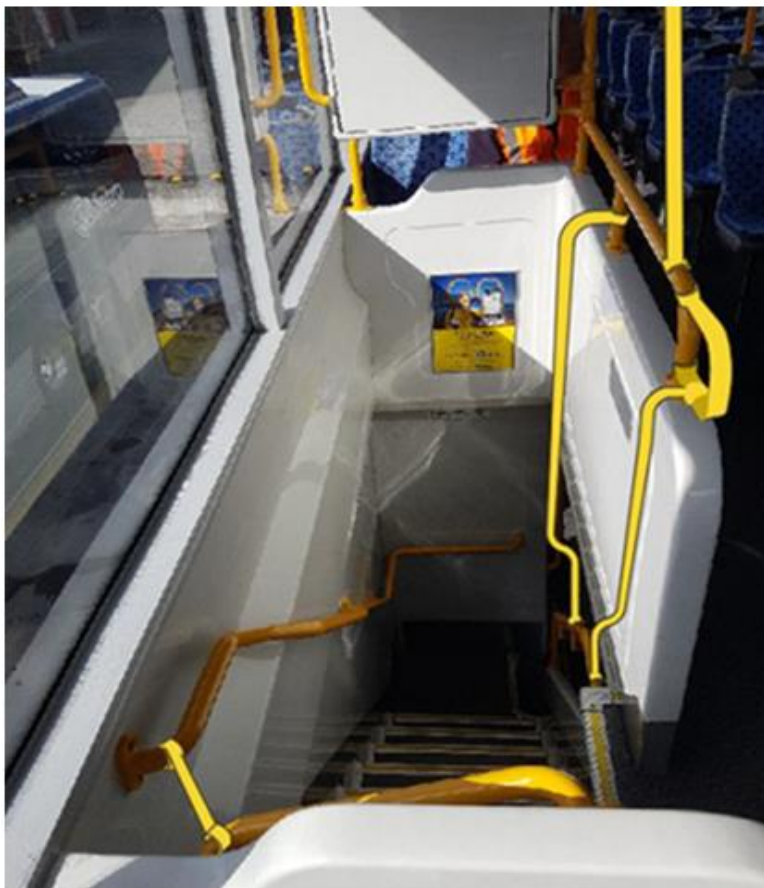

AT Trial DD Bus

In this example the fitment of the handrail is too low. The fitment of handrails in the stairwell must be at an appropriate level to avoid passengers walking down the stairs having to reach down, which changes their centre of gravity.

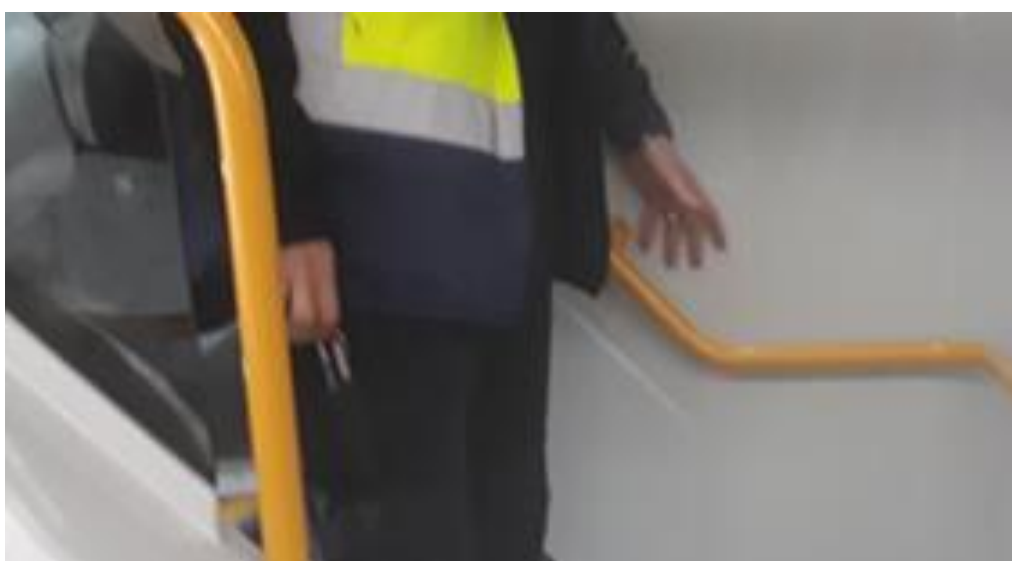

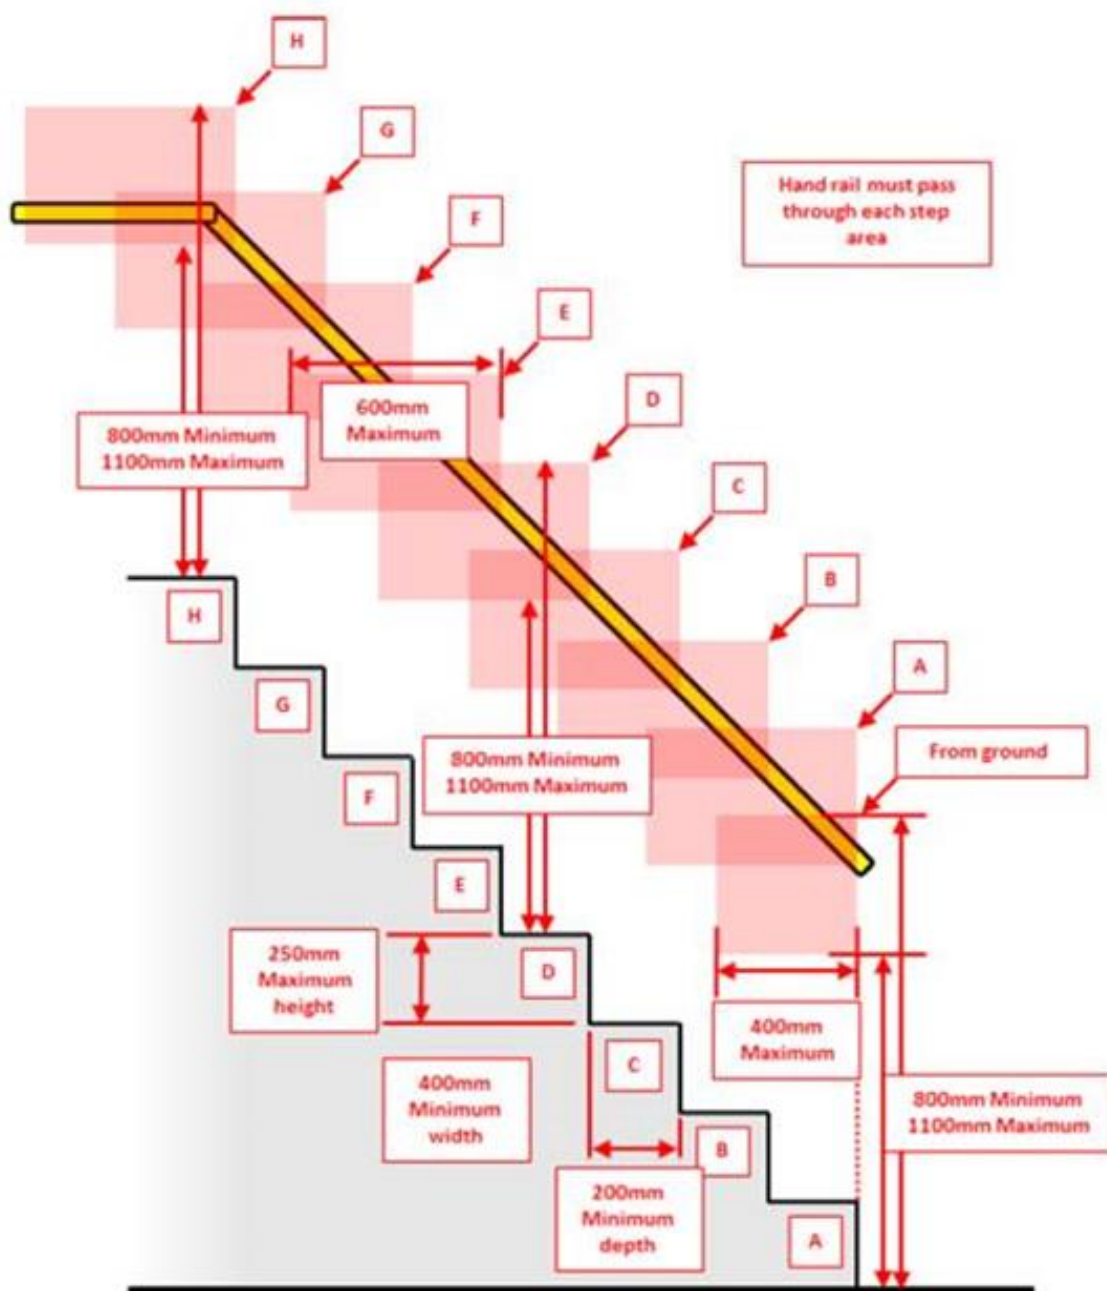

The diagram above shows required measurements for the handrail in the DD stairwell.

4.9. Grab handles on seat backs

All forward or rearward-facing seats must have a grab handle that is accessible from the aisle side. Additional grab handles on the faces of wheel arches can also be beneficial.

| | |
|---------------------|---|
| Design | As with stanchions and handrails, all grab handles shall be of the same high-visibility yellow colour material. For contrast refer to guidance for step and plinth edges (see Visual contrast (section 7.2)Visual contrast. |
| Measurements | Grab handles should have a circular or elliptical cross section . Finger and hand clearance space must be 35 to 45mm. The length must be at least 120mm, which is easier to grasp in a moving situation. |

4.10. Internal lighting

| | |
|--------------------------------------|--|
| Lighting type | <ul style="list-style-type: none"> Energy-efficient, substantially white lighting is required. |
| Measurement height | <ul style="list-style-type: none"> These should be measured at a height of 1000mm above the floor level (or each step in a DD stairwell) throughout the aisle of the bus. (Commercially available self-calibrated lux level meters are the recommended measurement method.) |
| Specifications: doorway steps | <ul style="list-style-type: none"> For all doorway step areas, and externally downwards and outwards for ≥ 300mm beyond the step edge to a level of ≥ 100 lux. Extinguished on door closure and prior to moving off. <p>Note: this should be measured at ground level below the doorway centre point and on the step edge to ensure maximum visibility.</p> |
| Fare paying area | <ul style="list-style-type: none"> ≥ 65 lux - extinguished on door closure and prior to moving off. The light should be directed away from the driver in this area. |
| General Saloon | <ul style="list-style-type: none"> Light levels in the general saloon area (including top deck), from immediately behind the driver's modesty panel, should be adjustable by the workshop. From a minimum of 20 lux to a maximum of 100 lux. |
| DD stairwell | <ul style="list-style-type: none"> ≥ 65 lux. Upper saloon of DD 40 lux. |
| Lighting system control | <ul style="list-style-type: none"> Must be fitted with automatic sensors to ensure the interior lighting is automatically switched on/off to maintain the minimum requirements. The lighting system must not be controlled from the driver's position. The interior lighting must be activated when the exterior lights are turned on. Lights to increase in general saloon to ≥ 65 lux when doors open to allow passengers to easily locate their seats and dim again once doors are closed. A driver-controlled button is required that dims the interior lighting for 2 minutes (and can then be pressed again) in case of excessive interior reflections. This should re-set when the door is opened. |

4.11. Security and safety

| | | |
|------|-------------------------------------|--|
| CCTV | General | <p>NOTE: it is important that the guidelines on the use of CCTV systems produced by the Privacy Commissioner are followed, including warning signs.</p> <p>The CCTV system shall, without any requirement for manual intervention or downloading, store recorded images from all cameras at the required frame rates and resolutions for a period of not less than 21 days at 10 hours operation per day. Where a CCTV system is installed on a bus operating a continuous/near to continuous service, the system requirement shall extend to a minimum of 14 days of the extent of the service.</p> <p>The CCTV system shall commence recording using all cameras within three (3) minutes whenever the bus's ignition is activated and is to continue recording for a period of at least fifteen (15) minutes after the ignition has been deactivated.</p> <p>Recordings may be overwritten when the storage medium reaches its recording capacity, unless tagged because of a duress (panic) alarm. Overwriting of recordings shall occur with the oldest recorded video overwritten first, ensuring that the most recent recording is preserved.</p> |
| | Digital video recorder (DVR) | <p>An orange light must be installed within the normal field of view of the driver as a warning if the DVR and CCTV is not operating.</p> <p>The DVR shall utilise hard-disk or solid-state recording media that does not require routine replacement or exchange in order to meet the storage requirements.</p> <p>In replaying video from any camera, it shall be possible to clearly identify the following information from the image and/or embedded data:</p> <ul style="list-style-type: none"> • Bus on which the recording was made. • Camera location on the bus. • The date and time of the recording. • The status of the duress alarm. <p>The DVR and cameras must be capable of the following minimums for day and night recording:</p> <ul style="list-style-type: none"> • Analog cameras D1 (704 x 576) @ 25 fps, and • IP cameras 720 p (1280 x 720) @ 25 fps. |
| | Cameras | <p>Cameras and their housings shall be mounted in such a manner so as to ensure that they are:</p> <ul style="list-style-type: none"> • visible and identifiable as a camera • unlikely to be accidentally knocked by passengers during normal boarding procedures • not adversely affected by the use or repositioning of sun visors, mirrors or other equipment • not susceptible to misalignment of the field of view. <p>CCTV cameras shall provide colour video where the scene luminance is above five (5) lux and may switch to monochromatic images to maintain the quality of recorded image where the available light falls below the day/night threshold of the camera.</p> |

| | | |
|--|-------------------------|--|
| | Camera placement | <p>VSB/SB - A minimum number of cameras installed so the field of view and configuration enables monitoring of the following areas:</p> <ol style="list-style-type: none"> 1. Entrance platform and passenger/driver interface. 2. From the front of the saloon area looking rearwards covering rear seated areas. 3. Forward facing to road ahead of the bus. 4. Kerb-side camera facing towards the rear monitoring door activity. <p>MB/LB/VLB – a minimum number of cameras installed so the field of view and configuration enables monitoring of the areas above plus the following areas:</p> <ol style="list-style-type: none"> 5. Exit area providing the driver with an unobstructed view of rear door to ensure passengers are well clear of the door before it is operated - mounted above the door looking down, so that the door is completely visible up to the 'no standing line. 6. Rear of interior seated area looking forwards, covering rear seated areas. 7. Between the rear door and the front door of the bus - mounted either at the front looking rearwards or at the rear door looking forwards (or ideally both) and covering the wheelchair spaces. <p>DD - a minimum number of cameras installed so the field of view and configuration enables monitoring as for MB/LB/VLB above, plus the following areas:</p> <ol style="list-style-type: none"> 8. From the rear of the upper saloon area looking forwards covering rear seated areas. 9. The top of the stairwell directed down the stairwell. 10. From the front of upper saloon seated area looking rearwards. |
| | Audio recordings | <p>A microphone shall be installed in the vicinity of the driver's cab and connected to the audio input of the DVR, such that audible sounds of conversations and other activity that occur within 2 metres of the driving seat.</p> <p>Whenever audio is recorded on the CCTV system, it shall be synchronised with the digital video recording and able to be played back with the video.</p> |
| | Driver's monitor | <p>The CCTV system must incorporate a 7" monitor, as a minimum, into a console within the field of view of the driver. This driver monitor may be used as a reversing camera monitor through automatic switching of the rear camera. The driver's monitor must have a test button or similar facility to allow the image from all cameras to be checked at any time.</p> <p>The monitor to be configured to allow the monitoring of all the views below simultaneously.</p> <p>DD</p> <p>Rear and/or front door open</p> <ul style="list-style-type: none"> • Stairs • Top level • Rear door inside <p>Doors closed and driving m</p> <ul style="list-style-type: none"> • Top deck view that also covers the entrance to the stairs • 3x blind spot cameras (reverse cameras) <p>Single deck</p> <p>Rear and/or front door open</p> <ul style="list-style-type: none"> • Rear door inside • Rear internal camera that looks forward • Wheelchair position <p>Doors closed and driving</p> |

| | | |
|---------------------------------|--|---|
| | | <ul style="list-style-type: none"> • 3x blind spot cameras (left flank, right flank and reverse cameras) • One camera providing an internal view of the saloon must be provided, to give the driver an alternative view to what he/she can see through the internal mirror. |
| Telematics | <p>Telematics systems must be included.</p> <p>Telematics must be able to monitor factors affecting passenger comfort; braking, acceleration, cornering and speeding. It must give the driver real-time feedback and enable incidents to be recorded and traceable to a particular driver.</p> <p>Fatigue/distraction detection and driver alert system must be installed and actively monitored. Parameters are eyes closed for 1.5 seconds and driver looking away from the road for 4 seconds and includes:</p> <ul style="list-style-type: none"> - Real time eye detection, which monitors both driver fatigue and driver distraction. - Real time alert system which notifies the driver of a fatigue or distraction event. - Real time notification system, which notifies the operator if the bus driver is experiencing multiple fatigue and/or distraction events during a driver duty. - Notification if the system is unable to detect the drivers face (which will alert and record when the drivers face is not within view of the camera, or if the camera becomes covered during the operation of the vehicle). - Data storage and uploads to enable monthly reports of fatigue and distraction events. | |
| Reversing system | <p>Buses must be installed with a reverse monitoring system which includes:</p> <ul style="list-style-type: none"> • Reversing camera (this could be part of the CCTV system, but does not need to be recorded). • Reversing sensors. • Reversing buzzers. • Hazard light activation upon the engaging of reverse gear. | |
| Blind spot camera system | <p>Buses are to be fitted with an external blind spot camera system. These cameras need not be recorded by the CCTV system but can be shared with the CCTV and reversing systems. The images are to be provided in real time to the driver at all times. This requires:</p> <ul style="list-style-type: none"> • Cameras that can provide a rear looking view of both sides of the bus from at least the front axle rearward. • A rearward looking view from the rear of the bus. | |
| DD upper body protection | <p>Upper deck 'tree guards' on both sides of the bus to deflect obstacles and offer protection to the bus superstructure are mandatory.</p> | |
| DD passenger safety | <p>Contrasting, easily seen signage (visible at the bottom and top entry points to the stairwell) with the words: 'Passengers must not stand in the stairwell when the bus is in motion' must be fitted. An upper deck passenger counting system is required so that passengers on the lower deck know if any seating positions are available on the upper deck before entering the stairs. There must be an indicator at the bottom entry to the stairs that indicates the number of seating positions available on the upper deck. A duplicate indicator is to be fitted so that it is visible to the driver. A driver reset is required.</p> <p>Contrasting easily seen signage (visible at the bottom entry point to the stairwell and at the top of the stairs) with the words: 'Passengers must not stand on the upper deck' must be fitted.</p> | |

4.12. Heating, ventilation and air conditioning (HVAC)

Full air conditioning climate control is mandatory for all new urban buses.

| | |
|----------------------------|--|
| Requirements | <ul style="list-style-type: none"> There must be provision of a separate air conditioning system in the upstairs saloon of the DD. Provision of effective climate control is of greater priority in the upper saloon area because of the lower ceiling height and generally more confined/enclosed nature of the environment. Ensure vents are not directed at passengers. |
| Driver control | <ul style="list-style-type: none"> Systems that are independent of the driver adjusting settings are required. The driver must not have control over vehicle HVAC settings. |
| Temperature: saloon | <ul style="list-style-type: none"> The set-point of the temperature within the saloon areas is to be maintained at a temperature of 20°C +/- 2°C, when the bus is operating in an environment from 0°C to 30°C. This temperature must be achieved within 20 minutes of vehicle start-up. |

4.13. Demisting

| | |
|---------------------|---|
| Requirements | Demisting should be achieved within 20 minutes in the main saloon front and rear door glass and all windows and maintained during service at all times. |
|---------------------|---|

4.14. USB power ports

| | |
|---------------------|--|
| Requirements | <ul style="list-style-type: none"> USB ports must be provided for passengers to use and be easily accessed. |
|---------------------|--|

5. COMMUNICATION

5.1. Requirements

| | |
|---------------------|---|
| Requirements | <ul style="list-style-type: none"> The two-way radio communication system shall enable communication between the bus and back to base depot and to any central information or control centre. The system must be capable of broadcasting to all or to individual buses from the base depot, central information or control centre. A covert panic duress button must activate the system to tag the CCTV and start the audio recording. In addition, for fleets with more than 5 buses, open a radio channel to enable the operator control centre to hear the conversation on the bus. Note this channel must not be broadcast beyond the affected bus and the operator control centre. A public-address system capable of broadcasting driver announcements to passengers. |
|---------------------|---|

5.2. 'Bus stopping' electronic signs and buttons

All buses must be fitted with dual-indicator bus stopping signalling and acknowledgement display devices that are easily seen and heard by the driver and the passengers in all areas of the bus saloon. (This includes the upper saloon of an DD). Signalling devices must be in easy reach of all passengers whether seated or standing.

| | |
|--|---|
| Placement of buttons | <p>Bus stop buttons must be in easy reach (but not able to be accidentally triggered) of all passengers whether seated or standing as follows:</p> <ul style="list-style-type: none"> Easily reached by any person seated in a priority seating area or wheelchair area without having to stand up, eg fitted on side walls below the window frame or on stanchions or horizontal handrails. Easily used by elderly and disabled people with poor hand and finger function or dexterity. Shall be mounted to the walls or window ledge, between every row of seats and adjacent to and not less than every second row of seats on both sides of the aisle (on stanchions) as depicted by the image below. <div data-bbox="379 1310 1465 1720"> <p>The diagram illustrates the interior layout of a bus with various seating and standing areas. Red dots represent the required bus stop buttons. They are placed on the side walls below the window frames, on vertical stanchions, and on horizontal handrails. Specific labels point to 'Luggage' area, 'Bells', 'Seat mounted stanchions', and a 'Wheelchair Bell Press' near the front entrance. The layout shows rows of seats on both sides of a central aisle, with priority seating areas at the front.</p> </div> <ul style="list-style-type: none"> On the vertical stanchions at a minimum of 1100mm and a maximum of 1600mm above floor level. Must not be activated by horizontal cordage. |
| Audio-visual indication to driver | <p>The device shall trigger both an audible and visual indication to the driver, and passenger. For the passenger saloon there shall be at least two illuminated bus stopping signs (to meet</p> |

| | |
|---------------|---|
| | <p>the needs of people with a visual impairment, a mix of upper and lower-case characters is strongly preferred) with associated audible acknowledgement signals.</p> <p>The signs shall consist of one rearward facing to the saloon adjacent to the driver's area and a second forward and rearward facing repeater located near the rear door to acknowledge the request. This sign shall remain illuminated until cancelled by the operation of the door controls.</p> <p>The driver's dashboard indicator shall have two components: a general signal and a second signal to indicate to the driver that the signal has been made by a passenger occupying the wheelchair position to enable the driver to prepare for ramp deployment at the next stop.</p> |
| Design | <p>Bus stopping request devices shall be installed on the high-visibility yellow stanchion, with a high-visibility mounting holding a red push signal button, for example, the picture below depicts a button with braille on it for blind or vision-impaired passengers.</p> <div data-bbox="368 680 1428 1254" data-label="Image"> </div> <p>Bus stopping request devices in the wheelchair space shall be of a high-visibility yellow mounting holding a dark blue push signal button clearly marked with a wheelchair icon to prevent unintentional activation by able-bodied passengers.</p> |

5.3. External destination display

Clear information of the bus route, destination and intermediate points form an essential part of generating passenger confidence.

| | |
|-----------------------|---|
| Specifications | <ul style="list-style-type: none"> • Signs must be of the electromechanical or electronic matrix style, fitted with amber or white (front only) LED/LCD displays, with emphasis on high visibility during all light levels. • Rear sign must be amber LED/LCD displays. • Signs must be able to be easily read by the majority of sighted current or potential passengers as the bus approaches or departs. For visibility requirements, refer to 7.2. • Signs must be able to switch between secondary destinations. |
|-----------------------|---|

| | |
|------------------------------|---|
| | <ul style="list-style-type: none"> • All letters must be in lower case, except for the first letter, eg Lower Hutt. • Dot matrix must not be used. |
| All buses | <p>All buses shall have the following signs:</p> <ul style="list-style-type: none"> • Front forward-facing three digit/character route-number and destination combination sign a minimum of 1500mm wide located at or above the top of the windscreen. • Near side, as close as possible to the front entrance, a route number and destination display, at a height of not less than 1.2 metres to the lower edge of the display characters and not more than 2.5 metres to the upper edge of the display characters measured from the ground and, if fitted with a kneeling system, with the vehicle in the normal condition for vehicle travel. <p>At the back of the bus a three digit/character route-number and destination combination sign a minimum of 1500mm height and a maximum height of 2500mm above ground level and central or left of centre, ie toward the nearside of the bus, and a minimum width of 1350mm wide.</p> <p>Front forward-facing</p> <ul style="list-style-type: none"> • The glass fitted in front of all destination signs must be clear. • The destination display light sensor must be fitted towards the bottom of the display so that it has access to direct sunlight. |
| Message configuration | <p>Front and rear route number characters must be a minimum of 200mm high.</p> <p>Front and rear primary destination characters must be a minimum of 125mm high and secondary destination characters a minimum 90mm high.</p> <p>Side route number and destination characters must be a minimum of 70mm high. Message scrolling needs to be full word, not by character. Where information cannot fit onto a single screen, additional information should page (alternate), not scroll.</p> |
| Extra destinations | <p>The sign must be controlled by the driver from the driving position and be capable of storing a range of different route and destination information as well as displaying whether the bus is not in service, on charter, school or special work.</p> |

5.4. Exterior promotional area

Advertising must not interfere with ventilation grills. Emergency exit windows must not be prevented from working, legally required lights must not be covered, and bus (fleet) numbers must be clearly visible at all times. Consideration must be given to passenger comfort and medical conditions, for example, dot matrix can cause epileptic seizures.

5.5. Internal information

Buses must be equipped with provision for power and cabling to allow for LCD screens to enable visual and audible automated progressive route and journey-related information and announcements. Progressive route and journey-related information presented on an electronic information display provides vital information on the route being taken

and the current location of the bus. This information provides confidence to the user and helps to ensure they do not find themselves getting off at the wrong stop which also may present safety issues, particularly at night.

| | |
|---------------------------------------|---|
| Electronic information display | <ul style="list-style-type: none"> • Mounting location for an LCD screen size to range between 20-22" (510-560 mm). • Draw cables to be easily accessible for the retrospective laying in of cables between the passenger information screens and media enclosure. • Speakers to be fitted and wired back to the media enclosure. • The media enclosure needs to allow a space of 300mm wide, 300mm deep and 200mm high for a media unit. The future location of screens will be as follows and there shall be an enclosure provided for the future fitting of a media player. <p>Screen placement locations –</p> <p>Single deck – 3 screens:</p> <ul style="list-style-type: none"> • One screen fitted to the rear of the driver's partition facing rearward. • Two screens - one facing forward visible to the rear-facing wheelchair passengers in the wheelchair bays, and one facing rearward, fitted to the offside of the bus. <p>DD – 4 screens:</p> <ul style="list-style-type: none"> • One screen fitted offside of the bus facing rearward (at the back of the stairwell). • One screen fitted to the side of the stairwell, facing the wheelchair position. • Two screens on the upper deck, one fitted to the front windscreen and the other to be fitted to the rear of the stairwell, facing rearward. <p>Note that the positions selected for the screens must avoid reflection on the windscreen that is visible to the driver.</p> |
| Audio announcements | <ul style="list-style-type: none"> • Except on a VSB eight speakers are to be fitted equally spaced throughout the bus on each level directly above the seats. There needs to be a speaker directly above wheelchair positions, priority seats, and the second row of seats from the rear of the bus of both decks of the bus. • Speakers are not to be fitted in or near the driver's compartment. • The speakers for a DD bus need to be wired so that the volume can be set at different levels for upper and lower decks. The speakers are to be connected to the media enclosure. |

6. EXISTING BUSES

6.1. Introduction

There are a large number of buses used in the urban bus fleets that have been purchased over the last 20 years. Some of the more recent ones will meet or exceed all or most of the criteria listed in this document for new buses, but many of the earlier purchases will not.

Waka Kotahi encourages operators to speed up the replacement of the older less user or environmentally friendly vehicles, and to retrofit as many of the features in the previous sections as is possible.

Existing buses aged between 20 and 23 years old may be used for school only use with prior local authority approval, providing evidence is provided of a planned replacement programme.

6.2. Existing bus standards

Existing buses: all buses currently used in urban services shall meet the following requirements (also refer to sub-section 1.2.3):

| | |
|--------------------------------|---|
| Acceleration | 0-50km/h ≤30 seconds. |
| Emissions | As per the RUB when bus entered urban service, Euro 3 emissions standard a minimum. |
| Transmission | LB automatic. |
| Suspension | LB Full air with levelling. |
| Doors | VSB/SB: 1. MB/LB/VLB: 2 mandatory - if ≥36 seating positions. Front door width ≥700mm. |
| Step height | ≤370mm. |
| Floor and levels | Non-slip material in boarding and aisle area. No more than two steps in the aisle along whole internal length of vehicle excluding any footrest plinth to the rear seats. |
| Step edge | Highlighter to top edge of nose. |
| Stanchions / Handrails | One close to each door plus at least two in each saloon area, ie forward of rear door and behind rear door. |
| Grab handles | On aisle side of all seat backs. |
| Heating and ventilation | Drivers area plus ≥2 saloon heaters. |
| Demisting | Front windscreen and front door windows. |

| | |
|-------------------------|---|
| Bus stop request | Bell push within reach of seated and standing passengers in every second row of seats. Illuminated bus stopping display with audible signal. |
| Destination | Front route no - three characters $\geq 100\text{mm}$ in height. Front and side destination characters $\geq 60\text{mm}$ in height. |

6.3. Midlife refurbishment requirements

At the midlife of a bus (8-10 years), it is expected that buses are refurbished to the requirements of this version of the RUB 2020. This may be negotiated between the operator and regional council. The bus will remain in the same size category after this refurbishment, independent of the number of seats.

| | |
|---|--|
| Required | <p>At midlife refurbishment, the following must be updated to this version of the RUB:</p> <p>2. DESIGN AND PERFORMANCE</p> <p>2.3. Performance (only the hold brake / interlock / fire suppression)</p> <p>3. VEHICLE ENTRANCE AND EXIT</p> <p>3.1. Ramp</p> <p>3.2. Ticketing/fare collection area</p> <p>3.3 Sensitive edge on front and rear doors</p> <p>3.5. Step and plinth edges</p> <p>4. VEHICLE INTERIOR</p> <p>4.1. Driver compartment</p> <p>4.2. Driver operational communication</p> <p>4.3. Priority seating area</p> <p>4.4. Wheelchairs</p> <p>4.5. Floors</p> <p>4.6. Aisle width</p> <p>4.8. Stanchions/handrails</p> <p>4.9. Grab handles on seat backs and elsewhere</p> <p>4.10. Internal lighting</p> <p>4.11. Security and safety</p> <p>5. COMMUNICATION</p> <p>5.1. Requirements</p> <p>5.2. 'Bus stopping' electronic signs and buttons</p> <p>5.4. Internal information</p> |
| Optional (at council's discretion) | <ul style="list-style-type: none"> • Wall lining • Ceiling panels • Seat upholstery • Seating design |

7. APPENDIX

7.1. Items not included


Waka Kotahi is also aware that there are other issues that are as important as vehicle design and construction. One example is the quality of the infrastructure that enables use of a public transport system, eg, bus stop location and design, kerb heights and facilities (eg, in terms of weather protection), information, suitability for use by persons of all ages and capabilities, and ease of transfer opportunities. However, defining the infrastructure requirements is not included as part of this document, nor is driver training.

As part of a programme of work designed to improve the effectiveness of public transport, Waka Kotahi has developed bus stop infrastructure guidelines to apply nationally which borrow heavily from the extensive work completed by Auckland Transport on bus stop design and facilities. This document can be found on the Waka Kotahi website by searching for 'guidelines for public transport infrastructure and facilities'.

Waka Kotahi worked with the BCA back in 2011 to develop and roll out a customer service training programme for bus operators to use for driver training. The resources and tools are available through the BCA and are free to its members.

7.2. Visual contrast

Seventy percent minimum visual contrast is required. Greatest contrast is achieved by choosing opposite (not adjacent) colours of the colour wheel. For example, red and orange are not contrasting whereas red and green are contrasting. For more information, refer to [RTS 14](#) section 5.3.

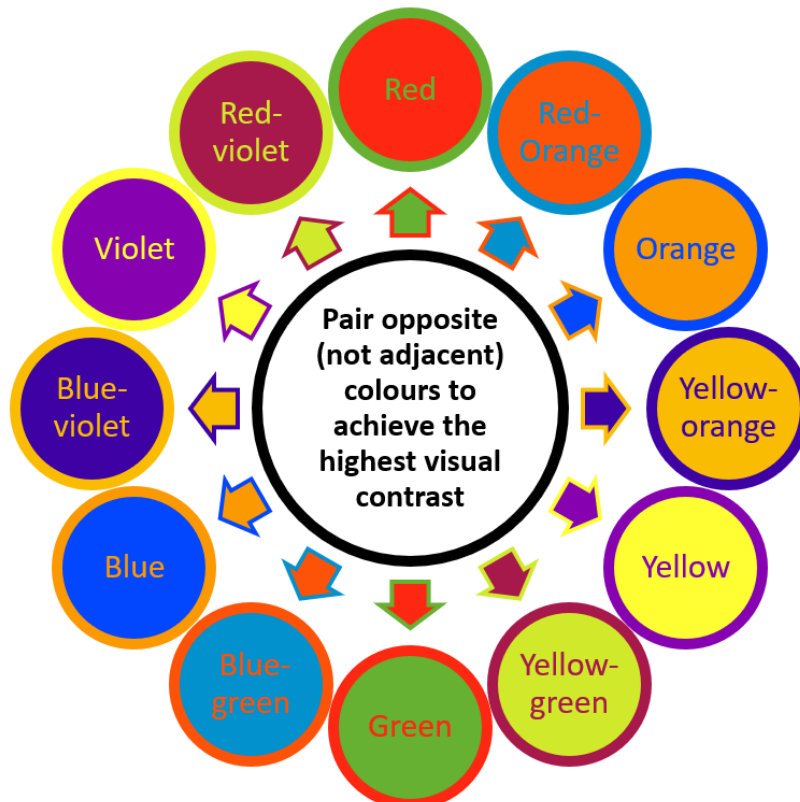


The Blind Foundation and the Association of Blind Citizens of New Zealand recommend the use of safety yellow as the colour that is most easily distinguished by the visually impaired (refer to subsection 3.4), and for this reason it is mandatory.

The bus steps' high-contrast nosing in the horizontal and vertical planes is to be within the range of 45–50 mm. See the Blind Foundation's Accessible signage guidelines (<http://blindfoundation.org.nz/about/business-services/environmental-design-advisory/accessiblesignage/download-the-accessible-signage-guidelines>).

7.3. Bicycle racks

Bike racks are optional (at regional council/Auckland Transport's discretion), but if fitted, they must meet relevant regulatory requirements and must meet the following:


| | |
|---|--|
| <p>Location of rack and measurements</p> | <p>Bicycle racks must be placed on the front of the bus with the number plate and/or school sign clearly showing (as shown in the pictures below).</p>  |
| <p>Weight and type restrictions</p> | <p>Bike racks must carry a minimum of two standard bikes at a time. They must accommodate a bike of up to 25kg and wheels between 40.5 cm (16") and 75 cm (29") diameter.</p> <p>The following bike types and accessories do not have to be accommodated on the racks:</p> |

- Cargo-type bikes - they do not fit in the bike racks.
- Bikes with fat tyres - they also do not fit in the bike rack.
- High-backed child seats, or any bikes/bike accessories that can obstruct the driver's visibility are not allowed for safety reasons.

7.4. Noise measurement


7.4.1.1. External noise measurement for vehicles in motion:

At least four measurements shall be made on each side of the vehicle. The microphone shall be located at a distance of $7.5\text{m} \pm 0.05\text{m}$ from the reference line CC' of the track and $1.2\text{m} \pm 0.02\text{m}$ above the ground.

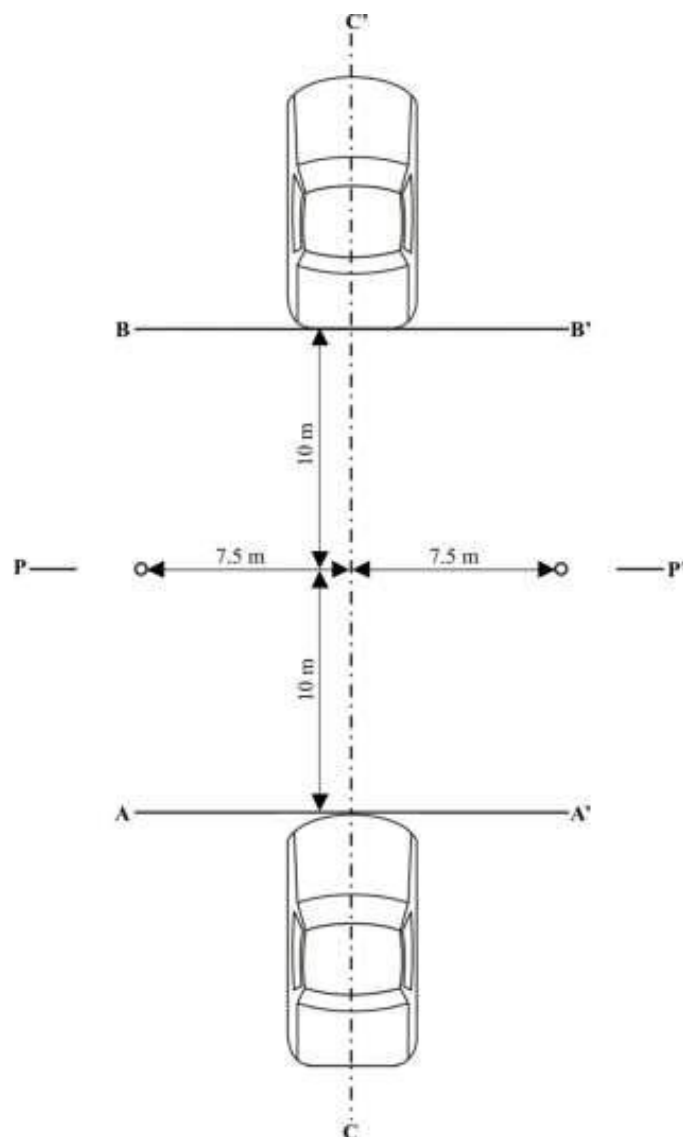

Microphone placement diagram from UN/ECE Reg. 51, Annex 3 – Appendix, Figure 1.

7.4.1.2. Air brake noise measurement: microphone positions from UN/ECE Reg. 51, Annex 5 – Appendix, Figure 1.

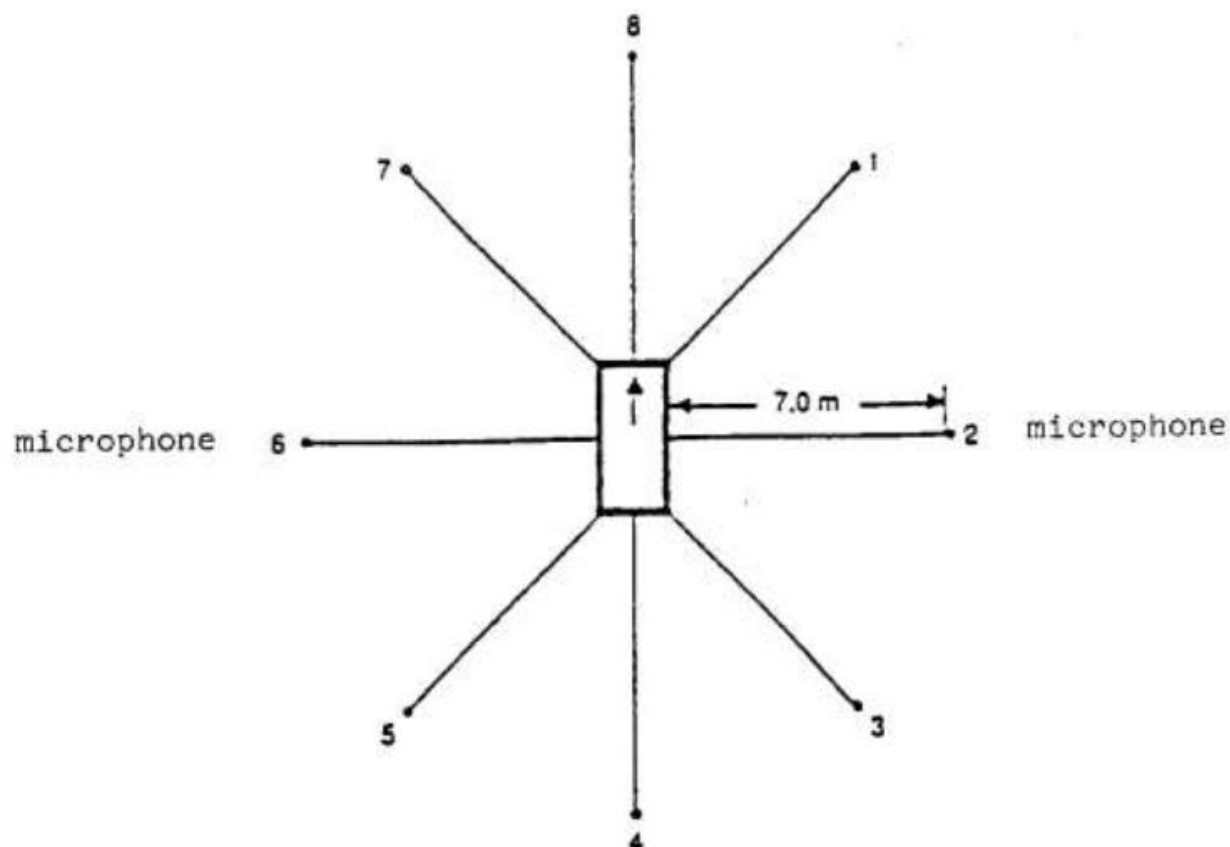

7.5. Process for seeking a variation to these requirements

7.5.1.1. RUB and Waka Kotahi procurement rules

Using the RUB is a Waka Kotahi requirement through the Procurement manual, procurement rule 10.31 (see below). Note: Failure to comply with these procurement procedures for urban public transport services will be considered a breach under section 36 of the LTMA. Note that the Planning and Investment Knowledge Base also requires approved organisations to comply with the RUB to qualify for NLTP consideration, by following the Waka Kotahi [Procurement manual](#): for the activities funded through the NLTP and procurement rules, as well as any relevant standards or guidelines listed in the Waka Kotahi register of network standards and guidelines (in this case the RUB).

10.31. Procurement Rule

All urban bus public transport unit contracts must incorporate the vehicle standards contained in the Requirements for urban buses in New Zealand: New Zealand's common standard for urban bus quality (RUB).

7.5.1.2. Guidelines

The RUB has been developed in collaboration with regional councils, BCA, operators, bus builders and suppliers. User groups were also consulted as part of its development.

As determined by this current review, the RUB will be the standard for all urban buses in New Zealand and that the dimensions and features in the RUB are accepted by all regional councils as a prerequisite for receiving Waka Kotahi investment.

The RUB will be reviewed every 3–5 years or from time-to-time as a need is identified by the sector. The most recent RUB update must always be used in tenders and this can be found at Requirements for urban buses in New Zealand: New Zealand's common standard for urban bus quality (RUB). In addition, all urban bus public transport units must consider the additional matters and good practice as set out in the RUB.

Any regional council, operator or manufacturer wanting to depart from the requirements of the RUB must first apply to the Waka Kotahi Public Transport Manager for approval via email to Public.Transport@nzta.govt.nz using normal processes for a variation to a procurement procedure which can be found on the Waka Kotahi website:

<https://www.nzta.govt.nz/resources/procurement-manual/> Section 10.31, and using the form <https://www.nzta.govt.nz/assets/resources/requirements-for-urban-buses/docs/rub-procurement-variation-application.doc>

The approval process will involve engagement with the RUB industry working group on the proposed variation. A public record of all changes will also be maintained. A significant variation will require the involvement of the Waka Kotahi Board.

It is possible that some services may require a higher or different standard of vehicle to operate temporarily, or for a longer period of time, eg some high-frequency inner-city routes may be better served by a wider rear door or provision for more standees. It is also possible that the RUB may require variation to capitalise on an improvement in technology. Waka Kotahi is keen to see bus companies and regional councils use any benefits that flow from technological advances which improve safety, access or environmental aspects.

In some regions, buses may be used to provide regular services to satellite or dormitory areas and a different/lower specification may seem justified. However, with one exception (ie accepting a single door at the front for longer distances), Waka Kotahi does not see a need to relax the requirements set by the RUB for buses operating such services, unless the roading or terrain is such that the operation of buses complying with this specification is not practical (in which case a specific variation application could (and should) be sought. This situation aside, the RUB

will continue to apply to the services described above in order to maximise the opportunity to promote public transport as a means of travel to the maximum range and number of people. This is expected to occur because:

- people with disabilities can also be expected to use these services, and
- buses on these routes can be expected to pick up and set down passengers as they move in and out of an urban area and these passengers will expect the buses to be of a similar standard to those used within an urban area.

Moreover, we understand from discussions with public transport operators that there are likely to be times when the bus company running the services described above will want to use the buses on those services on urban services instead, in order to maximise bus utilisation.

8. FUTURE INTENTION

8.1. Future technologies intended to be required (in no particular order):

- Cyclist detection system.
- Acoustic vehicle alerting system on electric bus to alert blind and low-vision pedestrians.
- Autonomous braking.
- Non-carbon fuelled buses, eg electric and hydrogen-fuelled.
- Lane-keep assist.

9. APPENDIX 1: PROCUREMENT VARIATION APPLICATION TEMPLATE

Procurement variation application

(approved organisation to complete)

This form is to be used whenever an approved organisation wishes to depart from a procurement procedure that includes the specifications known as Requirements for urban buses in New Zealand: New Zealand's common standard for urban bus quality (2021) (RUB) of the Waka Kotahi Procurement manual: for activities funded through the National Land Transport Programme. Information submitted will assist in the timely and efficient processing of variation requests.

A separate form is required for each variation application.

On completion, approved organisations should submit this form to the Waka Kotahi Public Transport Manager for approval via email to Public.Transport@nzta.govt.nz. Any queries regarding the form should also be directed to Public.Transport@nzta.govt.nz.

Name of procurement procedure and variation

1. [include name], including the RUB – variation [insert name, eg requested by X Regional Council July 2015]

Background information

2. The service(s) affected by the proposed variation are as follows:

[list]

[Also include a brief description of each service affected by the proposed variation to bus specs, eg route description, frequency, contract commencement and expiration, any other relevant background including previous variations if relevant].

3. *The purpose of this section is to identify affected sections of the RUB, explain the relationship between the proposed variation and the Waka Kotahi previously approved procurement procedure (ie the RUB and also the approved organisation's procurement strategy (if different). Go on to explain how the variation contributes to the objectives of the RUB.*

The proposed variation concerns the following section of the RUB:

[list section reference]

[provide other information described above]

4. *The purpose of this question focussing on reasons is to uncover as much helpful information as possible for identifying benefits, value, options and other information relevant to the statutory tests in*

section 25 of the Land Transport Management Act. A short summary only is required, however, try to provide enough information so that the Waka Kotahi person responsible for receiving the application and managing it internally has sufficient detail for the memo they will have to submit to the person with authority to approve/decline this application.

The variation is being sought because [state reasons].

Best value for money, etc

5. In council's view, the proposed variation contributes to the goal of obtaining best value for money spent by Waka Kotahi and council in the following ways:

Best value for money – describe if and how the requested procurement procedure variation (or your recommended option) achieves best value for money in terms of the use of funds from the NLTF. You may wish to describe this by referring to how the variation contributes to the 5 objectives of the LTMA (ie assisting economic development, assisting safety and personal security, improving access and mobility, protecting and promoting public health, ensuring environmental sustainability), and/or by describing other benefits that will result, and/or the alternatives/options assessed above, ie which one (decline or approval or variation on approval) provides the best value for money.

[state here]

Enabling fair competition – explain whether the proposal does enable fair competition for the right to supply outputs required for the affected passenger service(s). Again, a comparison of alternatives/options could be useful.

[state here]

Encouraging competitive and efficient markets for supply – explain whether the proposal will encourage competitive and efficient markets for the supply outputs required for the affected passenger service(s). Where possible, this should be quantified, eg size of local/regional market and the share that a supplier will have under this proposal (if applicable). Again, a comparison of alternatives/options could be useful.

[state here]

Financial matters

6. *The purpose of this section is help with the value for money assessment*

The current cost of the contract is \$[state here].

The variation is anticipated to cost \$[state here].

Future variations

7. [state here].

Alternatives considered

8. The purpose of this section is help with the s25 assessment by comparing the proposed variation to other available options.

Alternatives considered:

[describe]

Option one - preferred option

[describe option, then explain contribution to s25 outcomes].

Best value for money

[state here]

Enabling fair competition

[state here]

Encouraging competitive and efficient markets for supply

[state here]

Option two – [eg proceed without variation]

[describe option, then explain contribution to s25 outcomes]

Best value for money

[state here]

Enabling fair competition

[state here]

Encouraging competitive and efficient markets for supply

[state here]

Option three – [eg any other option as determined by approved organisation]

[describe option, then explain contribution to s25 outcomes]

Best value for money

[state here]

Enabling fair competition

[state here]

Encouraging competitive and efficient markets for supply

[state here]

Supporting

9. Further supporting information is attached in the form of [describe or delete this section if not relevant].

Response to the variation application

(Waka Kotahi to complete)

Further information requested

Date returned to requestor

Approved/not approved and reason(s)

Signed

Date approved organisation notified