


Wēiti River Bridge

Western temporary platform works

Western temporary platform facts

- Works start on the west side of the river
- Lifespan: 3.5 years
- A 280 tonne crane will be used to carry out works
- 243m length
- 20,000 cubic metres of dirt moved for temporary access track
- 64 piles
- Pile diameter: 762mm
- Maximum pile depth: 17m in the middle of the river

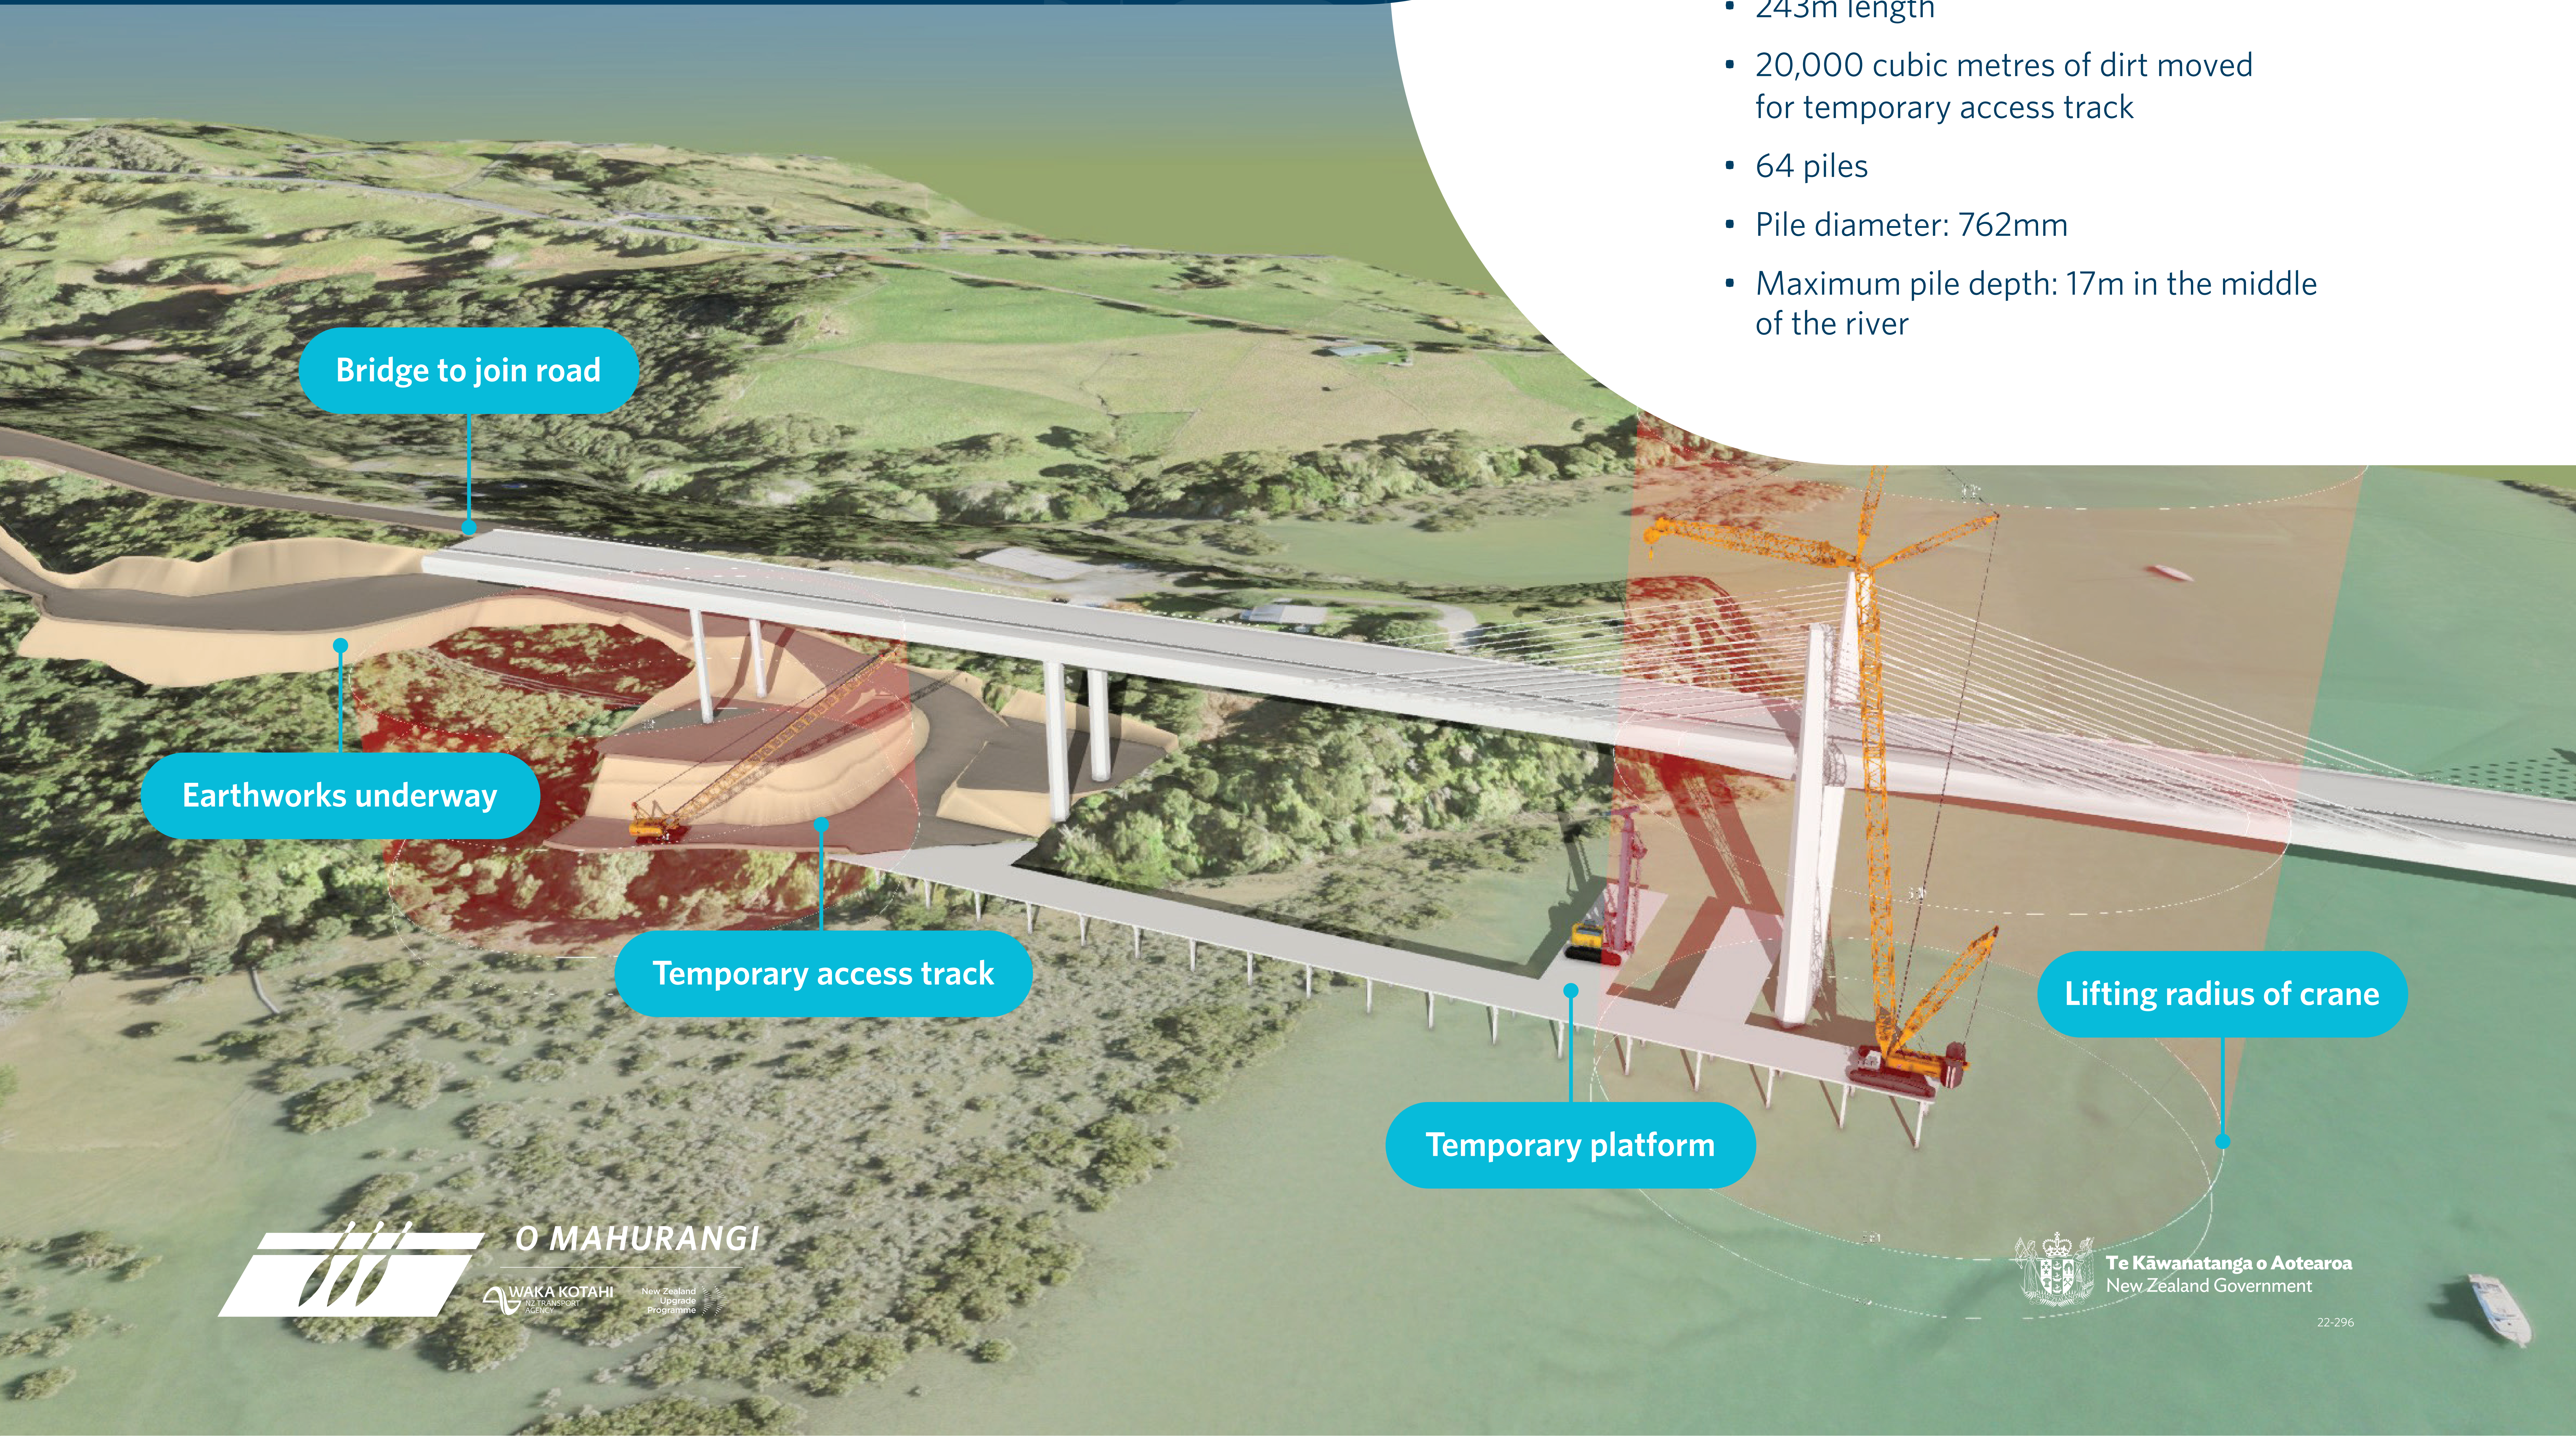

Bridge to join road

Earthworks underway

Temporary access track

Temporary platform

Lifting radius of crane



O MAHURANGI



New Zealand
Upgrade
Programme



Te Kāwanatanga o Aotearoa
New Zealand Government